



Connectors, reducers and couplers

HGL-T T-Connector, IP68

T-connector with conduit seals.

Fulfils IP66, IP67, IP68 and IP69k.


Features and benefits

- Fast fit T-shaped connector
- Includes removable inspection lid
- High pull-off strength
- Highly resistant to solvents and oils
- Free of halogen, sulphur and phosphorus



HelaGuard HGL-T, T-Connector with conduit seals.

MATERIAL	Polyamide 6.6 (PA66), Thermoplastic Elastomer (TPE)
Operating Temperature	-50 °C to +135 °C
Flammability	UL 94 V2

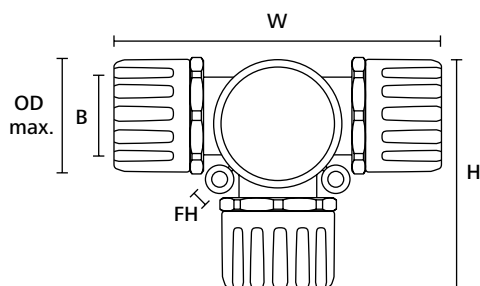

HelaGuard fitting, T-connector

TYPE	From nominal diameter	To nominal diameter	Min. Bore Size (B)	Outside Ø max (OD max.)	Width (W)	Height (H)	Hole Ø (FH)	Pack Cont.	Colour	Article-No.
HGL16-T	16	16	14.0	33	96	62	6.2	5 pcs.	Black (BK)	166-24900
HGL21-T	21	21	19.0	34	99	63	6.2	3 pcs.	Black (BK)	166-24901
HGL28-T	28	28	25.0	45	125	87	6.0	3 pcs.	Black (BK)	166-24902
HGL34-T	34	34	33.0	48	130	91	7.2	2 pcs.	Black (BK)	166-24903
HGL42-T	42	42	41.0	55	150	110	7.2	1 pcs.	Black (BK)	166-24904

All dimensions in mm. Subject to technical changes.

Colour grey available on request. Minimum Order Quantity (MOQ) may differ from package content.



Please note! Not all products listed on this page may have this approval. Please check our website for latest approvals.



Add items to your watchlist!

www.HT.click/52-55

