



Connectors, reducers and couplers


HG-HG Conduit Coupler IP66

Features and benefits

- One piece, fast fit
- Joins corrugated conduits



HeliaGuard HG-HG Coupler.

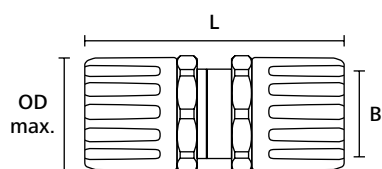

HeliaGuard fitting, coupler

MATERIAL	Polyamide 6.6 (PA66)
Operating Temperature	-50 °C to +135 °C



TYPE	From nominal diameter	To nominal diameter	Min. Bore Size (B)	Outside Ø max (OD max.)	Length (L)	Pack Cont.	Colour	Article-No.
HG16-HG16	16	16	11.0	29	59	10 pcs.	Black (BK)	166-24600
HG21-HG21	21	21	14.5	32	71	10 pcs.	Black (BK)	166-24601
HG28-HG28	28	28	19.5	44	81	10 pcs.	Black (BK)	166-24602
HG34-HG34	34	34	26.5	51	87	10 pcs.	Black (BK)	166-24603
HG42-HG42	42	42	32.5	63	101	2 pcs.	Black (BK)	166-24606

All dimensions in mm. Subject to technical changes.
Minimum Order Quantity (MOQ) may differ from package content.

