



Fittings for metallic conduits with plastic coating

PCS-SMC Swivel thread compression fitting, IP65

External thread, nickel plated brass with internal plated steel circlip.
Fulfil IP65.

Features and benefits

- Multipart compression fitting including elastomeric seal
- Provides excellent tensile strength
- External thread swivels about main body even after tightening




HelaGuard PCS-SMC Swivel Compression Fitting.

MATERIAL	Nickel Plated Brass (NPB), Polyamide 6 (PA6), Plated Steel (PS)
Operating Temperature	-50 °C to +135 °C

HF ✓

RoHS ✓

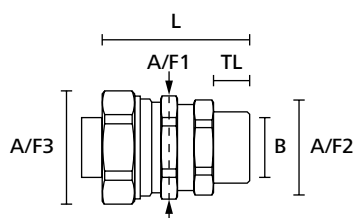

HelaGuard compression fitting, straight with swivel external thread

TYPE	Nominal Ø	Thread Size	Min. Bore Size (B)	Length (L)	A/F Body (A/F1)	A/F Thread (A/F2)	A/F Nut (A/F3)	Thread Length (TL)	Pack Cont.	Colour	Article-No.
PCS12-SMC-M16	12	M16	8.6	39.0	20	20	22	10.0	10 pcs.	Metal (ML)	166-31500
PCS16-SMC-M16	16	M16	11.5	40.9	24	24	26	10.0	10 pcs.	Metal (ML)	166-31501
PCS16-SMC-M20	16	M20	11.5	41.0	24	24	26	10.0	10 pcs.	Metal (ML)	166-31502
PCS20-SMC-M20	20	M20	15.3	41.8	26	26	29	10.0	10 pcs.	Metal (ML)	166-31503
PCS25-SMC-M25	25	M25	19.1	50.7	33	29	35	12.0	10 pcs.	Metal (ML)	166-31504
PCS32-SMC-M32	32	M32	26.0	56.9	40	38	42	13.0	2 pcs.	Metal (ML)	166-31505

All dimensions in mm. Subject to technical changes.
Minimum Order Quantity (MOQ) may differ from package content.

