



Fittings for spiral-reinforced PVC conduits

PSRSC-FMC compression fitting

Straight fitting, fixed external thread, nickel plated brass.


Fulfills IP66, IP67, IP68 and IP69k with PSRSC conduits.

Features and benefits


- Multipart compression fitting including elastomeric seal
- Can be used for knockouts or threaded entries as fitting rotates until tightened
- Fits PSRSC conduits



PSRSC-FMC-Fittings with PG-Thread available on request.



HelaGuard compression fitting, straight with fixed external thread

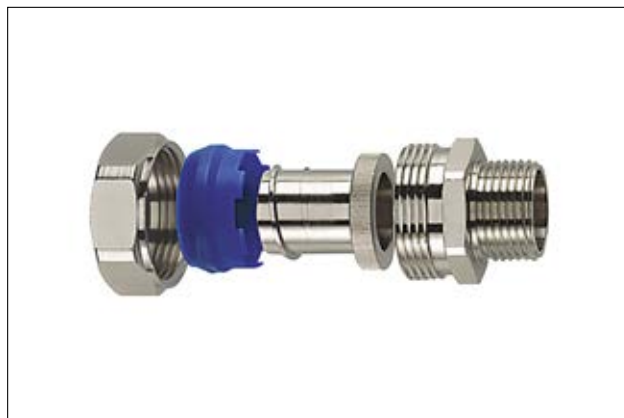

HelaGuard PSRSC-FMC Compression Fitting.

MATERIAL	Nickel Plated Brass (NPB), Polyamide 6 (PA6)
Operating Temperature	-50 °C to +135 °C

HF ✓

RoHS ✓

TYPE	Nominal Ø	Thread Size	Min. Bore Size (B)	Length (L)	A/F Body (A/F1)	A/F Nut (A/F3)	Thread Length (TL)	Pack Cont.	Colour	Article-No.
PSRSC12-FMC-M16	12	M16	8.6	29.8	20	22	10.0	10 pcs.	Metal (ML)	166-41001
PSRSC16-FMC-M16	16	M16	10.7	33.0	24	26	12.0	10 pcs.	Metal (ML)	166-41002
PSRSC16-FMC-M20	16	M20	10.7	33.0	24	26	12.0	10 pcs.	Metal (ML)	166-41003
PSRSC20-FMC-M20	20	M20	14.5	33.5	26	29	12.0	10 pcs.	Metal (ML)	166-41004
PSRSC25-FMC-M25	25	M25	18.0	40.5	33	35	14.0	10 pcs.	Metal (ML)	166-41005
PSRSC32-FMC-M32	32	M32	24.6	45.8	40	42	15.0	2 pcs.	Metal (ML)	166-41006
PSRSC40-FMC-M40	40	M40	32.7	47.5	50	52	16.0	1 pc.	Metal (ML)	166-41007
PSRSC50-FMC-M50	50	M50	37.7	51.0	58	58	16.0	1 pc.	Metal (ML)	166-41008
PSRSC63-FMC-M63	63	M63	49.0	58.8	70	70	20.0	1 pc.	Metal (ML)	166-41009

All dimensions in mm. Subject to technical changes.
Minimum Order Quantity (MOQ) may differ from package content.

