

Fittings for spiral-reinforced PVC conduits

PSRSC-FMCFSS compression fitting for food-processing applications

Straight fitting, external thread, stainless steel (SS316).

Fulfils IP66, IP67, IP68 and IP69k with PSRSC conduits.

Features and benefits


- Multipart stainless steel (SS316) compression fitting including elastomeric seal
- Rounded edges, smooth surfaces and no crevices where food or other substances can collect or bacteria grow with EN standards
- Can be used for knockouts or threaded entries as fitting rotates until tightened
- Fits PSRSC conduits



HelaGuard PSRSC-FMCFSS stainless steel fittings for applications in the food-processing industry.

MATERIAL	Stainless Steel (SS316), Nickel Plated Brass (NPB), Polyamide 6 (PA6)
Operating Temperature	-50 °C to +135 °C

RoHS ✓

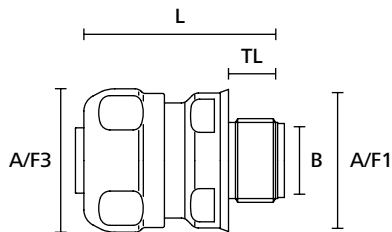

HelaGuard compression fitting, straight with fixed external thread

TYPE	Nominal Ø	Thread Size	Min. Bore Size (B)	Length (L)	A/F Body (A/F1)	A/F Nut (A/F3)	Thread Length (TL)	Pack Cont.	Colour	Article-No.
PSRSC16-FMCFSS-M16	16	M16	10.7	45.6	27	29	12.0	1 pc.	Metal (ML)	166-41601
PSRSC20-FMCFSS-M20	20	M20	14.5	46.0	30	32	12.0	1 pc.	Metal (ML)	166-41602
PSRSC25-FMCFSS-M25	25	M25	18.7	49.7	36	38	14.0	1 pc.	Metal (ML)	166-41603
PSRSC32-FMCFSS-M32	32	M32	24.6	53.7	42	45	15.0	1 pc.	Metal (ML)	166-41604
PSRSC40-FMCFSS-M40	40	M40	32.7	58.4	52	56	16.0	1 pc.	Metal (ML)	166-41605
PSRSC50-FMCFSS-M50	50	M50	37.7	62.5	59	62	16.0	1 pc.	Metal (ML)	166-41606

All dimensions in mm. Subject to technical changes.
Minimum Order Quantity (MOQ) may differ from package content.



Add items to your watchlist!
www.HT.click/52-103

