



Heat shrinkable tubing 3:1 in a kit

ShrinkKit 321-A - with adhesive liner - 210 pcs. - BK/CL

The black tubing is mainly used for environmental sealing of splices and connectors. The transparent tubing is typically used for protection of cable markers.


Features and benefits

- Adhesive lined heat shrink tubing
- Inner wall melts when heated and is forced into gaps
- Adhesive forms seal against moisture as tubing cools
- Black tubing mainly for the protection of connectors and splices
- Clear tubing ideal for protection of printed label markers
- Case can be re-used for storing nails, screws, nuts, fish hooks, etc.
- Compartment size changeable by simply moving yellow space dividers
- 210 precut pieces



ShrinkKit 321-A - 210 pcs 3:1 dual wall heat shrink assortment.

MATERIAL	Polyolefin, cross-linked (PO-X)
Shrink Ratio	3:1
Operating Temperature	-55 °C to +110 °C
Min. Shrink Temperature	+110 °C
Longitudinal Change After Shrinkage	+1%/-15% max.
Dielectric Strength	15 kV/mm
Flammability	self-extinguishing (except transparent)
Insulation Class	A (VDE 0530)

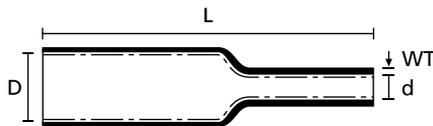

Heat Shrinkable Tubing 3:1 with adhesive



COMP.	Supplied Ø D min.	Recov. Ø d max.	Length (L)	Wall (WT)	Colour	Content	Tools	Article-No.
1	24.0	8.0	200.0	2.50	Black (BK)	5 pcs.	30	380-03003
2	12.0	4.0	65.0	1.70	Transparent (CL)	15 pcs.		
3	6.0	2.0	50.0	1.10	Black (BK)	20 pcs.		
	6.0	2.0	50.0	1.10	Transparent (CL)	20 pcs.		
4	12.0	4.0	65.0	1.70	Black (BK)	15 pcs.		
5	3.0	1.0	50.0	1.00	Black (BK)	50 pcs.		
	3.0	1.0	50.0	1.00	Transparent (CL)	50 pcs.		
6	6.0	2.0	35.0	1.10	Black (BK)	30 pcs.		
	6.0	2.0	35.0	1.10	Transparent (CL)	30 pcs.		
7	24.0	8.0	200.0	2.50	Transparent (CL)	5 pcs.		
8	12.0	4.0	100.0	1.70	Black (BK)	15 pcs.		
9	12.0	4.0	100.0	1.70	Black (BK)	15 pcs.		
10	12.0	4.0	100.0	1.70	Transparent (CL)	15 pcs.		
11	3.0	1.0	40.0	1.00	Black (BK)	50 pcs.		
	3.0	1.0	40.0	1.00	Transparent (CL)	50 pcs.		

All dimensions in mm. Subject to technical changes. Minimum Order Quantity (MOQ) may differ from package content.

Recommended Tools	
	30 H6100
	566

For more information on toolings please refer to the Application Tooling chapter.

