



Heat Shrinkable Tubing up to 4:1 - 1 m lengths

TREDUX MA47 medium wall - with adhesive liner

Suitable for insulation and protection of low voltage cable joints and terminations.

Features and benefits


- Medium wall heat shrink tubing
- Thermoplastic adhesive liner for protection from moisture and weathering
- 1 m shrink tubing lengths delivered in handy display carton
- All tubes can be sold in single 1 meter lengths or entire box



TREDUX MA47 in handy display carton.



www.HellermannTyton.co.uk/Tredux-cat22

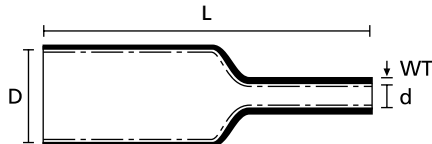

Heat Shrinkable Tubing 4:1 with adhesive

MATERIAL	Polyolefin, cross-linked (PO-X)
Shrink Ratio	up to 4:1
Operating Temperature	-55 °C to +110 °C
Softening Point Adhesive	+85 °C
Min. Shrink Temperature	+120 °C
Longitudinal Change After Shrinkage	-10% max.
Dielectric Strength	15 kV/mm
Flammability	not flame-retardant
Insulation Class	A (VDE 0530)

HF ✓

RoHS ✓

TYPE	Supplied Ø D min.	Recov. Ø d max.	Wall (WT)	Length (L)	Pack Cont.	Colour	Tools	Article-No.
TREDUX-MA47-12/3	12.0	3.0	2.00	1.0 m	6 pcs.	Black (BK)	30;32	323-50120
TREDUX-MA47-19/6	19.0	6.0	2.40	1.0 m	10 pcs.	Black (BK)	30;32	323-50190
TREDUX-MA47-30/8	30.0	8.0	2.60	1.0 m	6 pcs.	Black (BK)	30;32	323-50300
TREDUX-MA47-40/12	40.0	12.0	2.50	1.0 m	4 pcs.	Black (BK)	30;32	323-50400
TREDUX-MA47-50/16	50.0	16.0	2.70	1.0 m	2 pcs.	Black (BK)	30;32	323-50500
TREDUX-MA47-63/19	63.0	19.0	2.80	1.0 m	2 pcs.	Black (BK)	30;32	323-50630
TREDUX-MA47-75/22	75.0	22.0	3.00	1.0 m	2 pcs.	Black (BK)	30;32	323-50750
TREDUX-MA47-95/30	95.0	30.0	3.00	1.0 m	1 pc.	Black (BK)	30;32	323-50950

All dimensions in mm. Subject to technical changes.
Minimum Order Quantity (MOQ) may differ from package content.

Recommended Tools		
	30	32
	H6100	CHG900
	566	565

For more information on toolings please refer to the Application Tooling chapter.



Add items to your watchlist!

www.HT.click/49-230

