



Heat Shrinkable Tubing up to 4:1 - 1 m lengths

MU47 - medium wall unlined

Insulation and production of low voltage cable joints and terminations.

Features and benefits

- Medium wall heat shrink tubing
- Not adhesive lined
- Provides good mechanical strength
- Resistant to solvents, acids and alkaline solutions




Medium wall tubing MA47 with shrink ratio 4:1 and adhesive liner.



Detailed Information about Heatguns please refer to page 565.



Cut lengths available on request. Please contact us!

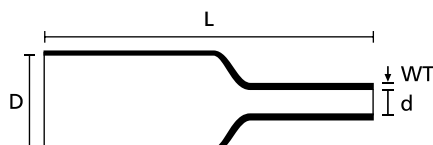

Heat Shrinkable Tubing 4:1

MATERIAL	Polyolefin, cross-linked (PO-X)
Shrink Ratio	up to 4:1
Operating Temperature	-55 °C to +110 °C
Min. Shrink Temperature	+120 °C
Longitudinal Change After Shrinkage	-10% max.
Dielectric Strength	15 kV/mm
Flammability	not flame-retardant

HF ✓

RoHS ✓

TYPE	Supplied Ø D min.	Recov. Ø d max.	Wall (WT)	Length (L)	Colour	Tools	Article-No.
MU47-12/3	12.0	3.0	1.80	1.0 m	Black (BK)	30;32	323-10120
MU47-19/6	22.0	6.0	2.40	1.0 m	Black (BK)	30;32	323-10190
MU47-30/8	33.0	8.0	2.60	1.0 m	Black (BK)	30;32	323-10300
MU47-40/12	40.0	12.0	2.60	1.0 m	Black (BK)	30;32	323-10400
MU47-50/16	55.0	16.0	2.90	1.0 m	Black (BK)	30;32	323-10500
MU47-63/19	65.0	19.0	2.90	1.0 m	Black (BK)	30;32	323-10630
MU47-75/22	75.0	22.0	3.00	1.0 m	Black (BK)	30;32	323-10750
MU47-95/30	95.0	25.0	3.60	1.0 m	Black (BK)	30;32	323-10950
MU47-115/34	115.0	34.0	3.50	1.0 m	Black (BK)	30;32	323-11150
MU47-140/42	140.0	42.0	3.30	1.0 m	Black (BK)	30;32	323-11400

All dimensions in mm. Subject to technical changes.
Minimum Order Quantity (MOQ) may differ from package content.

Recommended Tools		
	30	32
	H6100	CHG900
	566	565

For more information on toolings please refer to the Application Tooling chapter.

