



Long Outlet Shape, VG style

Helashrink 130 Series, with rib, low profile

Features and benefits


- Low profile and lightweight
- Typically used on airborne harnesses
- Rib locates on circular backshell



For Material / Adhesive information please refer to page 272, 273.



135-1-G as supplied / fully recovered.

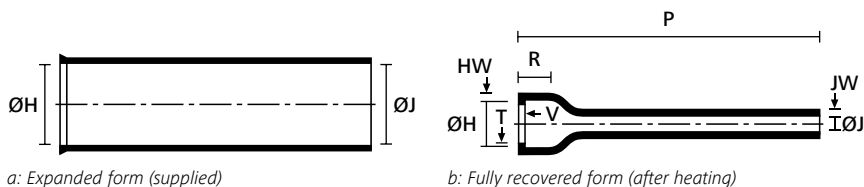

TYPE	ØH min. a	ØH max. b	ØJ min. a	ØJ max. b	P ± 10 %	R ± 10 %	HW ± 20 %	JW ± 20 %	V max	T ± 10 %	Designation as per VG-Norm	Article-No.
129-1-G	22.0	12.0	22.0	6.5	76.0	12.0	1.5	1.1	3.3	1.0	VG 95343 T06 D 001 A	401-29180
130-1-G	25.5	15.0	25.5	7.5	83.0	12.0	1.5	1.1	3.3	1.0	VG 95343 T06 D 002 A	401-30180
131-1-G	29.0	19.0	29.0	8.5	89.0	12.0	1.8	1.1	3.3	1.0	VG 95343 T06 D 003 A	401-31180
132-1-G	34.0	23.0	34.0	10.0	102.0	12.0	1.8	1.1	3.3	1.0	VG 95343 T06 D 004 A	401-32180
133-1-G	37.0	30.0	37.0	11.0	108.0	14.0	2.0	1.1	3.3	1.7	VG 95343 T06 D 005 A	401-33180
134-1-G	43.5	34.0	43.5	12.0	114.0	15.0	2.0	1.1	3.3	1.7	VG 95343 T06 D 006 A	401-34180
135-1-G	50.0	41.0	50.0	14.5	118.0	15.0	2.3	1.4	3.3	1.7	VG 95343 T06 D 007 A	401-35180
136-1-G	62.5	47.0	62.5	18.0	121.0	16.0	2.5	1.4	3.3	2.0	VG 95343 T06 D 008 A	401-36180
138-1-G	69.0	60.0	69.0	20.0	127.0	16.0	2.5	1.4	3.3	2.0	VG 95343 T06 D 009 A	401-38180

All dimensions in mm. Subject to technical changes.

For these moulded shapes a wide range of material / adhesive combinations are available. Please refer to the Moulded Shapes catalogue.



For product specific approvals and specifications please refer to the Appendix.



Add items to your watchlist!

www.HT.click/49-282

