



### 3-Way Outlet Shapes, VG style


#### Helashrink 300 Series

#### Features and benefits

- Cable strain relief and mechanical protection at harness transition points
- All outlets clearly marked to aid orientation during installation



304-1-G supplied / fully recovered.

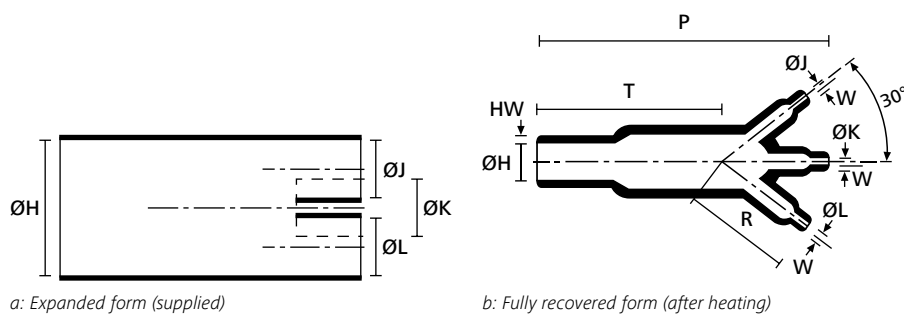

TYPE	ØH min. a	ØH max. b	ØJ/K/L min. a	ØJ/K/L max. b	P ± 10%	R ± 10 %	HW ± 30 %	W ± 20 %	T ± 10 %	Designation as per VG-Norm	Article-No.
306-1-G	13.0	6.5	6.5	3.5	46.0	21.0	1.5	1.0	20.3	VG 95343 T08 D 001 A	403-06180
304-1-G	27.0	13.5	13.0	7.0	93.0	43.0	2.5	1.5	42.9	VG 95343 T08 D 002 A	403-04180
310-1-G	38.5	19.0	19.0	10.0	135.0	62.0	3.0	1.8	61.0	VG 95343 T08 D 003 A	403-10180
311-1-G	55.5	25.5	27.0	12.5	192.0	89.0	4.5	3.1	88.9	VG 95343 T08 D 004 A	403-11180

All dimensions in mm. Subject to technical changes.

For these moulded shapes a wide range of material / adhesive combinations are available. Please refer to the Moulded Shapes catalogue.



For product specific approvals and specifications please refer to the Appendix.



Add items to your watchlist!

[www.HT.click/49-286](http://www.HT.click/49-286)

