



Locating Bushes


Helashrink 1760, 1790, 1820 Series

Features and benefits


- Provides location, cushioning, shimming and protection on cable runs through bulk head or enclosure entry points
- Available in a range of materials and adhesives for most applications.
- Designed for use on aerospace engine applications



1793-1 supplied / fully recovered.

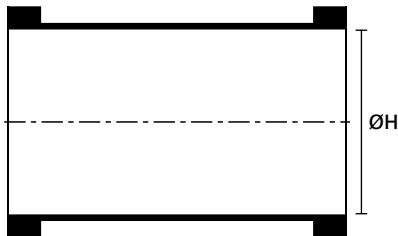

a: Expanded form (supplied)

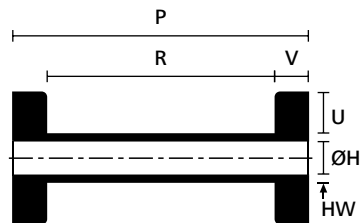

b: Fully recovered form (after heating)

TYPE	ØH min. a	ØH max. b	P ± 10%	R ± 10%	HW ± 20%	V ± 10%	U ± 20%	Article-No.
1822-1-G	12.0	5.9	30.0	24.0	6.1	3.0	2.0	418-22001
1796-1-G	15.0	6.4	29.0	24.0	1.5	2.5	2.0	417-96001
1823-1-G	16.0	7.8	32.0	24.0	6.2	4.0	2.0	418-23001
1793-1-G	20.0	9.5	35.0	25.0	1.5	5.0	3.0	417-93001
1795-1-G	26.0	12.7	35.0	25.0	2.0	5.0	3.0	417-95001
1794-1-L	30.0	18.0	35.0	25.0	2.0	5.0	3.0	417-94002

All dimensions in mm. Subject to technical changes.

For these moulded shapes a wide range of material / adhesive combinations are available. Please refer to the Moulded Shapes catalogue.



Add items to your watchlist!

www.HT.click/49-299

