



Hot Melt Tape for Heat Shrinkable Tubing and Shapes

HMT200A

Designed for use with heat shrink sleeving and mouldings.

Features and benefits

- Hot melt tape flows when heated to seal against moisture
- For heat shrink tubing and mouldings




www.HellermannTyton.co.uk/HMT200A-cat22



HMT200A-Tape.



Adhesive tape HMT200A for sealing against humidity.

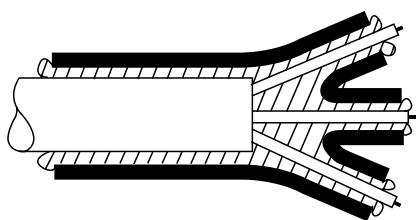

HMT200A

MATERIAL	Ethylenevinylacetate (EVA)
Operating Temperature	-55 °C to +105 °C

HF ✓

RoHS ✓

TYPE	Thickness (T)	Width (W)	Colour	Reel Length	Tools	Article-No.
HMT200A	0.25	25.0	Translucent (TT)	10 m	30;32	354-02260
	0.25	25.0	Translucent (TT)	50 m	30;32	354-02259

All dimensions in mm. Subject to technical changes.

Recommended Tools		
	30	32
	H6100	CHG900
	566	565

For more information on toolings please refer to the Application Tooling chapter.

