



PTFE Spiral Binding for superior protection

SBPTFE

Wherever superior protection against chemical and extreme temperatures are important, the use of SBPTFE is recommended.

Features and benefits


- High temperature resistance
- Excellent fire protection
- Self-extinguishing according to UL94 V0
- Very good solvent and acid resistance
- Organises and protects cables and hoses
- Suitable for retro-fitting
- Cables branch out at any point



Spiral binding SBTFE - ideal for extreme conditions.

MATERIAL	Polytetrafluoroethylene (PTFE)
Operating Temperature	-60 °C to +260 °C, intermittent +350 °C
Flammability	UL 94 V0

RoHS ✓

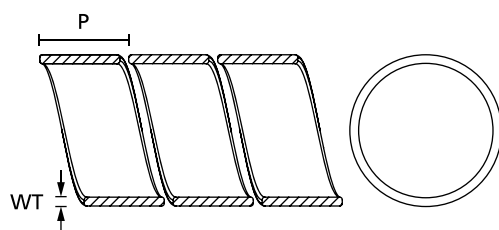

Spiral binding

TYPE	Nominal Ø	Wall (WT)	Pitch (P)	Bundle Ø min.	Bundle Ø max.	Colour	Reel Length	Article-No.
SBPTFE1.5	1.5	0.5	6.0	1.6	8	Natural (NA)	5 m	161-45000
SBPTFE4	4	0.7	7.8	5	20	Natural (NA)	5 m	161-45100
SBPTFE9	9	1.0	12.5	10	100	Natural (NA)	5 m	161-45200

All dimensions in mm. Subject to technical changes.
Minimum Order Quantity (MOQ) may differ from package content.

