



### Heat shrinkable tubing 3:1 in a kit

#### ShrinKit 321-A Basic - with adhesive liner - 130pcs - BK/CL

The black tubing is mainly used for environmental sealing of splices and connectors. The transparent tubing is typically used for protection of cable markers.


#### Features and benefits

- Adhesive lined heat shrink tubing
- Inner wall melts when heated and is forced into gaps
- Adhesive forms seal against moisture as tubing cools
- Black tubes mainly for the protection of connectors and splices
- Clear tubing ideal for protection of printed label markers
- 130 precut pieces in three sizes.



ShrinKit 321-A Basic - 130 pcs 3:1 dual wall heat shrink assortment.

<b>MATERIAL</b>	Polyolefin, cross-linked (PO-X)
<b>Shrink Ratio</b>	3:1
<b>Operating Temperature</b>	-55 °C to +110 °C
<b>Min. Shrink Temperature</b>	+110 °C
<b>Longitudinal Change After Shrinkage</b>	+1 %/-15 % max.
<b>Dielectric Strength</b>	15 kV/mm
<b>Flammability</b>	self-extinguishing (except for transparent)
<b>Insulation Class</b>	A (VDE 0530)

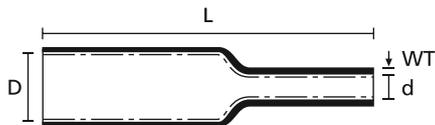

Heat Shrinkable Tubing 3:1 with adhesive



COMP.	Supplied Ø D min.	Recov. Ø d max.	Length (L)	Wall (WT)	Colour	Content	Tools	Article-No.
1	3.0	1.0	35.0	1.00	Black (BK)	25 pcs.	30;32	380-03004
2	12.0	4.0	35.0	1.70	Black (BK)	10 pcs.		
3	3.0	1.0	35.0	1.00	Transparent (CL)	25 pcs.		
4	6.0	2.0	35.0	1.10	Black (BK)	15 pcs.		
5	6.0	2.0	35.0	1.10	Transparent (CL)	15 pcs.		
6	6.0	2.0	35.0	1.10	Transparent (CL)	15 pcs.		
7	6.0	2.0	35.0	1.10	Black (BK)	15 pcs.		
8	12.0	4.0	80.0	1.70	Black (BK)	5 pcs.		
	12.0	4.0	80.0	1.70	Transparent (CL)	5 pcs.		

All dimensions in mm. Subject to technical changes. Minimum Order Quantity (MOQ) may differ from package content.

Recommended Tools		
	30	32
	H6100	CHG900
	564	563

For more information on toolings please refer to the Application Tooling chapter.



Add items to your watchlist!  
[www.HT.click/9-221](http://www.HT.click/9-221)

