

Heat shrinkable tubing 4:1 - Flame retardant

MA40 - medium wall adhesive lined


Designed for low voltage cable joints and terminations in shipbuilding. Insulates and protects against moisture.

Features and benefits

- Medium wall adhesive lined shrink tubing for low voltage power cables
- Designed for shipbuilding, Germanischer Lloyd approved
- Flame retarded
- UV and weather resistant
- Excellent mechanical performance



MA40 medium wall, adhesive lined and flame retarded tubing for shipbuilding applications.

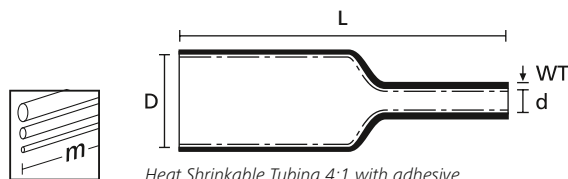

Heat Shrinkable Tubing 4:1 with adhesive

MATERIAL	Polyolefin, cross-linked (PO-X)
Shrink Ratio	up to 4:1
Operating Temperature	-55 °C to +110 °C
Min. Shrink Temperature	+120 °C
Softening Point Adhesive	+85 °C
Longitudinal Change After Shrinkage	-10 % max.
Dielectric Strength	15 kV/mm
Flammability	self-extinguishing

LFH ✓

RoHS ✓

TYPE	Supplied Ø D min.	Recov. Ø d max.	Wall (WT)	Length (L)	Colour	Tools	Article-No.
MA40-8/2	8.0	2.0	1.70	1.0 m	Black (BK)	30;32	323-00100
MA40-12/3	12.0	3.0	2.00	1.0 m	Black (BK)	30;32	323-00101
MA40-16/5	16.0	5.0	2.00	1.0 m	Black (BK)	30;32	323-00103
MA40-22/6	22.0	6.0	2.40	1.0 m	Black (BK)	30;32	323-00104
MA40-33/8	33.0	8.0	2.50	1.0 m	Black (BK)	30;32	323-00105
MA40-40/12	40.0	12.0	2.60	1.0 m	Black (BK)	30;32	323-00106
MA40-55/16	55.0	16.0	2.70	1.0 m	Black (BK)	30;32	323-00107

All dimensions in mm. Subject to technical changes.
Minimum Order Quantity (MOQ) may differ from package content.

Recommended Tools		
	30	32
	H6100	CHG900
	564	563

For more information on toolings please refer to the Application Tooling chapter.



For product specific approvals and specifications please refer to the Appendix.



Add items to your watchlist!
www.HT.click/9-253

