

Heat shrinkable tubing 3:1 - Flame retardant

TA37 – thin wall adhesive lined

TA37 shrink tubing has a low smoke index and excellent flame retardant properties to meet strict fire security standards in electrical insulation.


Features and benefits

- Thin wall adhesive lined heat shrink tubing
- Halogen free
- Flame retardant
- Combination of these three (halogen free, adhesive lined and flame retardant) product properties is unique




TA37 - Halogenfree and self-extinguishing 3:1 Thin Dual Wall Heat Shrink Tubing.

MATERIAL	Polyolefin, chemically cross-linked (PO-X)
Shrink Ratio	3:1
Operating Temperature	-40 °C to +105 °C
Min. Shrink Temperature	+120 °C
Softening Point Adhesive	+85 °C
Longitudinal Change After Shrinkage	+3 %/-15 %
Dielectric Strength	19.7 kV/mm
Flammability	self-extinguishing, low smoke generation, low generation of toxic gases and corrosive acid

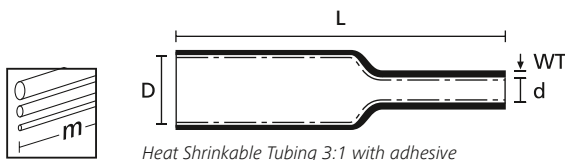

Heat Shrinkable Tubing 3:1 with adhesive



TYPE	Supplied Ø D min.	Recov. Ø d max.	Wall (WT)	Length (L)	Colour	Tools	Article-No.
TA37 3-1	3.2	1.0	0.95	1.2 m	Black (BK)	30;32	315-13000
TA37 4.5-1.5	4.8	1.5	1.10	1.2 m	Black (BK)	30;32	315-13001
TA37 6-2	6.4	2.0	1.20	1.2 m	Black (BK)	30;32	315-13002
TA37 9-3	9.5	3.0	1.30	1.2 m	Black (BK)	30;32	315-13003
TA37 12-4	12.7	4.0	1.40	1.2 m	Black (BK)	30;32	315-13004
TA37 19-6	19.1	6.0	2.20	1.2 m	Black (BK)	30;32	315-13005
TA37 24-8	24.0	8.0	2.50	1.2 m	Black (BK)	30;32	315-13006
TA37 40-13	40.0	13.0	2.50	1.2 m	Black (BK)	30;32	315-13007
TA37 50-19	50.0	19.0	4.00	1.2 m	Black (BK)	30;32	315-13008
TA37 75-25	75.0	25.0	3.00	1.2 m	Black (BK)	30;32	315-13009
TA37 120-45	120.0	45.0	4.00	1.2 m	Black (BK)	30;32	315-13011

All dimensions in mm. Subject to technical changes.
Minimum Order Quantity (MOQ) may differ from package content.

EN 45545-2

For product specific approvals and specifications please refer to the Appendix.



Add items to your watchlist!
www.HT.click/9-265

