



T-Shapes, VG style/MIL style

Helashrink 1200 Series

Features and benefits


- Strain relief, sealing and mechanical protection on cable harnesses



For Material / Adhesive information please refer to page 274, 275.



1202-1-G recovered onto a cable harness.

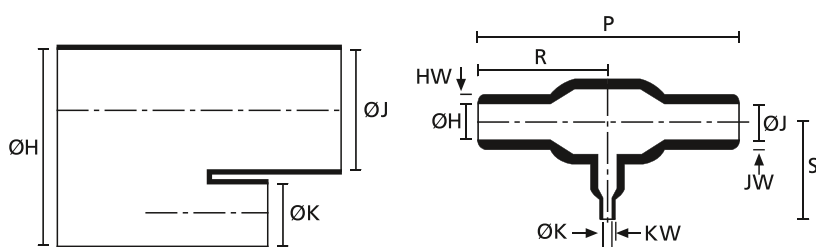

a: Expanded form (supplied)

b: Fully recovered form (after heating)

TYPE	ØH/J min. a	ØH/J max. b	ØK min. a	ØK max. b	P ± 10 %	R ± 10 %	HW ± 20 %	JW ± 30 %	KW ± 20 %	S ± 10 %	Designation as per VG-Norm	Article-No.
1206-1-G	6.5	3.5	6.5	3.5	30.0	15.0	1.0	1.0	1.0	15.0	VG 95343 T08 A 009 A	412-06180
1203-1-G	13.0	6.0	6.5	3.0	52.0	26.0	1.5	1.5	1.0	19.3	VG 95343 T08 A 001 A	412-03180
1202-1-G	13.0	7	13.0	7	59.0	29.5	1.5	1.5	1.5	29.2	VG 95343 T08 A 010 A	412-02180
1205-1-G	17.5	9.0	7.5	4.0	51.0	25.5	1.5	1.5	1.0	25.5	-	412-05180
1201-1-G	17.5	9.0	10.0	5.0	47.0	23.5	1.5	1.5	1.0	23.5	VG 95343 T08 A 007 A	412-01180
1207-1-G	27.0	12.4	27.0	13.5	120.0	60.0	2.5	2.5	2.5	59.9	VG 95343 T08 A 011 A	412-07180
1209-1-G	27.0	13	13.0	6.0	108.0	54.0	2.5	2.5	1.5	38.6	VG 95343 T08 A 002 A	412-09180

All dimensions in mm. Subject to technical changes. For these moulded shapes a wide range of material / adhesive combinations are available. Please refer to the Moulded Shapes Catalogue.



For product specific approvals and specifications please refer to the Appendix.



Add items to your watchlist!

www.HT.click/9-294

