



Angle Shapes

Helashrink 1800 Series, with rib, 45°angle

Features and benefits


- Provides strain relief and mechanical protection for harness systems
- Use in conjunction with a circular grooved adaptor
- For use in elevated temperature scenarios



For Material / Adhesive information please refer to page 274, 275.



1837-5 supplied / fully recovered.

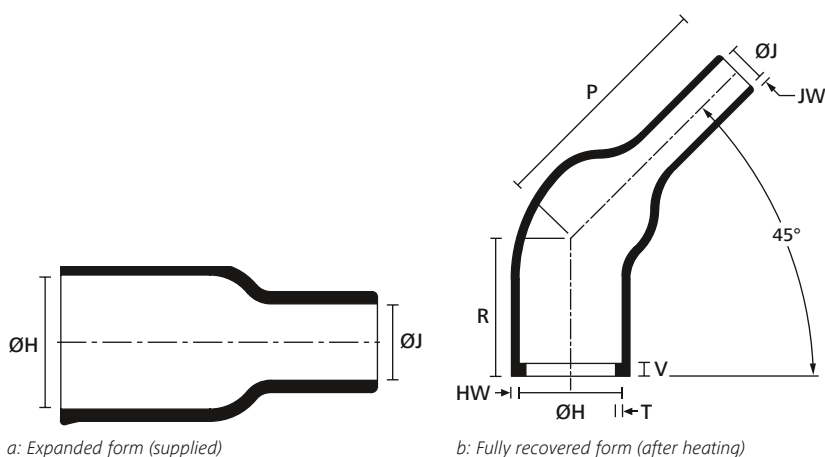

| TYPE | ØH min. a | ØH max. b | ØJ min. a | ØJ max. b | P ± 10 % | R nom. | HW ± 20 % | JW ± 30 % | V max. | T ± 20 % | Article-No. |
|----------|-----------------|-----------------|-----------------|-----------------|-------------|-----------|--------------|--------------|-----------|-------------|-------------|
| 1834-5-L | 10.0 | 6.6 | 4.0 | 2.0 | 14.2 | 15.2 | 1.0 | 0.6 | 1.5 | 0.6 | 418-34002 |
| 1835-5-L | 15.0 | 7.6 | 7.0 | 3.5 | 15.7 | 16.3 | 1.0 | 0.6 | 1.5 | 0.6 | 418-35002 |
| 1836-5-L | 19.0 | 9.9 | 8.0 | 4.0 | 19.0 | 12.7 | 1.0 | 0.6 | 1.5 | 0.6 | 418-36002 |
| 1837-5-L | 27.0 | 13.9 | 11.0 | 5.8 | 29.9 | 19.0 | 1.0 | 0.6 | 1.5 | 0.6 | 418-37002 |

All dimensions in mm. Subject to technical changes. For these moulded shapes a wide range of material / adhesive combinations are available. Please refer to the Moulded Shapes Catalogue.

