

Type label identification, thermal transfer

Helatag 1204

This silver-matt label is scratch-resistant and is ideal for usage as identification or name plate in industrial environments. The high temperature range suits a wide range of applications on flat surfaces. The adhesive is also suitable for critical surfaces like plastic and paint. Designing and printing labels is simple and users can quickly print out professional labels in a matter of moments when using TagPrint Pro labelling software.


Features and benefits

- Replacement option for aluminium plates
- For applications on flat surfaces
- Allows the identification on critical surfaces, e.g. paints and plastic variants
- Print labels with customer unique references
- Use text, graphics and barcodes as required



Professional type plate on a heating unit.

MATERIAL	Type 1204, Polyester (1204)
Operating Temperature	-40 °C to +150 °C
Curing Temperature	from 0 °C
Adhesive	Acrylic
Thickness of Foil	53 µm
Chem. Material Properties	Excellent resistance to water, alcohol, most oils, greases, fuel, aliphatic solvents, weak acids, salts and alkalis.
Recommended Ribbon Type	TT822OUT
Thermal Transfer Printer	TT431, TT4030



TYPE	Width (W)	Height (H)	Width of Liner (WL)	Labels per Row	Pack Cont.	Colour	Article-No.
TAG71TD6-1204-SR	12.7	11.1	101.6	6 pcs.	15,000 pcs.	Silver-matt (MTSR)	596-12071
TAG13TD4-1204-SR	19.1	6.4	101.6	4 pcs.	10,000 pcs.	Silver-matt (MTSR)	596-12043
TAG34TD3-1204-SR	25.4	9.5	85.1	3 pcs.	7,500 pcs.	Silver-matt (MTSR)	596-34120
TAG15TD3-1204-SR	25.4	12.7	85.1	3 pcs.	7,500 pcs.	Silver-matt (MTSR)	596-12045
TAG35TD3-1204-SR	31.8	9.5	101.6	3 pcs.	7,500 pcs.	Silver-matt (MTSR)	596-12035
TAG17TD2-1204-SR	38.1	6.4	85.1	2 pcs.	5,000 pcs.	Silver-matt (MTSR)	596-12047
TAG27TD2-1204-SR	38.1	19.1	85.1	2 pcs.	5,000 pcs.	Silver-matt (MTSR)	596-27120
TAG67TD2-1204-SR	38.1	31.8	85.1	2 pcs.	1,000 pcs.	Silver-matt (MTSR)	596-12067
TAG69TD2-1204-SR	40.6	22.9	89.0	2 pcs.	2,500 pcs.	Silver-matt (MTSR)	596-12069
TAG77TD1-1204-SR	50.8	22.9	55.0	1 pc.	2,000 pcs.	Silver-matt (MTSR)	596-12077
TAG73TD1-1204-SR	50.8	25.4	55.0	1 pc.	2,000 pcs.	Silver-matt (MTSR)	596-73124
TAG66TD1-1204-SR	50.8	36.5	56.8	1 pc.	1,000 pcs.	Silver-matt (MTSR)	596-12066
TAG63TD1-1204-SR	63.5	38.1	70.0	1 pc.	1,000 pcs.	Silver-matt (MTSR)	596-12063
TAG76TD1-1204-SR	63.5	50.8	70.0	1 pc.	500 pcs.	Silver-matt (MTSR)	596-12076
TAG72TD1-1204-SR	69.9	31.8	76.0	1 pc.	1,000 pcs.	Silver-matt (MTSR)	596-12072

All dimensions in mm. Subject to technical changes.

Minimum Order Quantity (MOQ) may differ from package content. Other packaging options may also be available.



For product specific approvals and specifications please refer to the Appendix.




Add items to your watchlist!
www.HT.click/9-509



Type label identification, thermal transfer

Helatag 1204

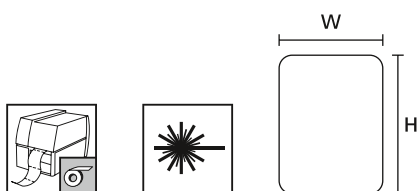

TYPE	Width (W)	Height (H)	Width of Liner (WL)	Labels per Row	Pack Cont.	Colour	Article-No.
TAG65TD1-1204-SR	76.2	36.5	82.0	1 pc.	1,000 pcs.	Silver-matt (MTSR)	596-12065
TAG62TD1-1204-SR	76.2	50.8	82.0	1 pc.	500 pcs.	Silver-matt (MTSR)	596-12062
TAG64TD1-1204-SR	88.9	36.5	95.0	1 pc.	1,000 pcs.	Silver-matt (MTSR)	596-12064
TAG97TD1-1204-SR	101.6	74.0	106.0	1 pc.	500 pcs.	Silver-matt (MTSR)	596-71204
TAG02TD1-1204-SR	104.0	12.0	104.0	1 pc.	5,000 pcs.	Silver-matt (MTSR)	596-21204
TAGR3TD1-1204-SR	104.0	75.0 m	108.0	1 pc.	75.0 m	Silver-matt (MTSR)	596-31204

All dimensions in mm. Subject to technical changes.

Minimum Order Quantity (MOQ) may differ from package content. Other packaging options may also be available.

Asset identification label, thermal transfer

Helatag 1206

This label is scratch-resistant and is ideal for usage as identification or name plate in industrial environments. The high temperature range suits a wide range of applications on flat surfaces. The adhesive is also suitable for critical surfaces like plastic and paint.

Designing and printing labels is simple and users can quickly print out professional labels in a matter of moments when using TagPrint Pro labelling software.

Features and benefits

- Ideal for machinery operating in high temperature areas (up to +150 °C)
- For applications on flat surfaces
- Chemical resistant polyester foil
- For permanent and ageing-resistant identification
- Barcodes and alphanumeric text remain pin sharp on this high quality material



Helatag labels for permanent asset identification.

MATERIAL	Type 1206, Polyester (1206)
Operating Temperature	-40 °C to +150 °C
Curing Temperature	from 0 °C
Adhesive	Acrylic
Thickness of Foil	50 µm
Chem. Material Properties	Excellent resistance to water, alcohol, most oils, greases, fuel, aliphatic solvents, weak acids, salts and alkalis.
Recommended Ribbon Type	TT822OUT
Thermal Transfer Printer	TT431, TT4030



For product specific approvals and specifications please refer to the Appendix.

