

Waste-free bundling up to Ø 80 mm

Cable ties for Autotool System 3080

The outside serrated strap is perfectly suitable for sensitive surfaces and can be used for bundling and fixing of cables, pipes and hoses, as well as for bag sealing.

The materials are particularly appropriate for high volume bundling applications in cable assembly, automotive, industrial and packaging applications.

Features and benefits

- Innovative two-piece consumables: closure and strap
- Outside serrated strap protects the bundle
- Available on reels of 500 m strap and 5,000 pcs. closures



Closures and strap for Autotool System 3080.


MATERIAL	Polyamide 6.6, high impact modified, heat and UV-stabilised (PA66HIRHSUV)	Polyamide 6.6, heat and UV-stabilised (PA66HSUV)
Operating Temperature	-40 °C to +95 °C, (+105 °C, 5000 h; +145 °C, 500 h)	-40 °C to +105 °C, (+145 °C, 500 h)
Flammability	UL 94 HB	UL 94 V2

RoHS

RoHS



Please find the corresponding Bundling Clips on page 136.

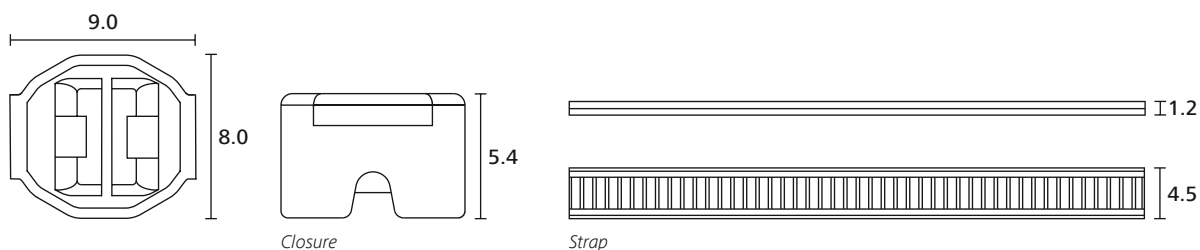

TYPE	Description	Bundle Ø max.	N	Colour	Material	Pack Cont.	Article-No.
Closures Black ATS3080	Closures Black ATS3080	80.0	225	Black (BK)	PA66HSUV	5,000 pcs.	102-66210
Closures Natural ATS3080	Closures Natural ATS3080	80.0	225	Natural (NA)	PA66HSUV	5,000 pcs.	102-66209
Strap Black ATS3080	Strap Black ATS3080	80.0	225	Black (BK)	PA66HIRHSUV	500 m	102-66110
Strap Natural ATS3080	Strap Natural ATS3080	80.0	225	Natural (NA)	PA66HIRHSUV	500 m	102-66109

All dimensions in mm. Subject to technical changes.
Minimum Order Quantity (MOQ) may differ from package content.

N = Minimum Loop Tensile Strength for Cable Ties (newton)



Add items to your watchlist!
www.HT.click/9-543