



### Parallel branch cable joints house connections

#### RELICON PAH-3 with PUR 771

The parallel branch joint PAH is a universal straight-through and branch joint. Suitable as single branch joint with commercial branch clamping rings. For polymeric cables and wires made of PVC, XLPE, PE, EPR and utility cables.


Application: In low-voltage electrical networks as branch joint for building connections. Underground, submerged, outdoor, indoor.

#### Features and benefits


- Impact-proof, transparent moulding shell
- Compact, optimized dimensions
- Longitudinally and transversely watertight
- SF-system
- Joint can be cast under influence of water
- Immediately ready for use
- Suitable for all compact branch clamping rings

#### Content of Set / Kit

- Cast resin PUR 771
- In a two-chamber pouch
- Transparent moulding shell
- Foam seal, protective gloves, emery cloth
- Cleaning cloth, cable kit, installation instructions
- SF-nozzle (two-chamber pouch)



PAH-3

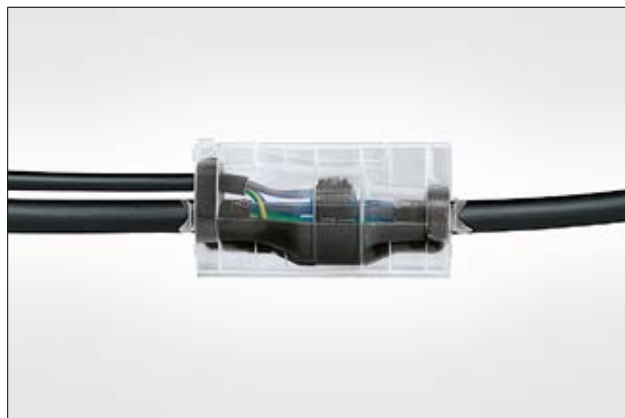

Parallel branch joint PAH-3 PUR771.

<b>MATERIAL</b>	Polyurethane resin (PUR)
<b>Colour</b>	Black (BK)
<b>Operating Temperature</b>	-25 °C to +120 °C
<b>Storage Temperature</b>	+4 °C to +40 °C
<b>Shelf Life</b>	36 months



**Without branch connector!**

TYPE	Ø Main Cable	Main Cable mm <sup>2</sup> min - max		Ø Branch Cable	Branch Cable mm <sup>2</sup> min - max		Length (L)	Height (H2)	Resin Quantity	Article-No.
PAH-3 / SF	27-49	4 x 35	4 x 185	15-33	4 x 6	4 x 70	360.0	135.0	2800 ml/3836 g	435-00184

All dimensions in mm. Subject to technical changes.