



Straight-through gel cable joints with connectors

RELICON Reliseal

Reliseal gel cable joints are suitable for cable connections under extreme conditions, outdoors and underground. They are universal straight-through joints with a protection class IP68 and consist of a solid polypropylene shell (PP) filled with RELICON gel. They can be used for jointing on polymeric cables and wires made of PVC, XLPE, PE, EPR, etc. Reliseal fulfils the highest requirements for electrical installations and offers mechanical protection, insulation and sealing in one work step. The installer saves time and requires no special installation tools.

Application: In low-voltage electrical networks as straight-through joint. In general connections in industrial buildings, underground, submerged, outdoor, indoor and in wiring ducts.

Features and benefits

- Moulding shell: one piece, re-openable, impact-proof, flame retardant
- Perfect strain relief provided by patented cable gland system
- Protection class IP68, 10 m
- Filled with RELICON non-toxic gel, high dielectric strength
- No mixing, easy to install
- UV, ageing and weather resistant
- Unlimited shelf life
- With connector, ready to assembly
- Tested according to EN 50393 and EN 60529

Content of Set / Kit

- Moulding shells filled with RELICON gel
- Cable gland system for strain relief and transverse waterproofing
- Adapter seals for a bigger range of cable diameters
- Installation instructions
- Connectors



Reliseal gel cable joint, available in three sizes.



Gel cable joint Reliseal V 56.



Gel cable joint Reliseal V 510.




Gel cable joint Reliseal V 525.



www.HellermannTyton.com/reliseal-relicon-bro20

MATERIAL	Polypropylene (PP), Silicone (SI)
Colour	Green (GN)
Operating Temperature	-20 °C to +90 °C
Shelf Life	Unlimited

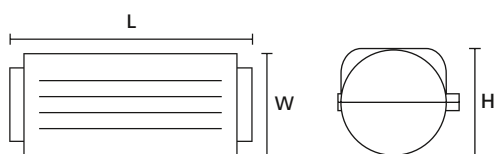

Reliseal V



With connector!



IP68, 10 meter

TYPE	Ø Main Cable	Main Cable mm ² min - max		Length (L)	Width (W)	Height (H)	Article-No.
Reliseal V56	12-18	3 x 2.5	5 x 6	190.0	60.0	47.0	435-01660
Reliseal V510	14-21	3 x 4	5 x 10	235.0	69.0	49.0	435-01661
Reliseal V525	20-30	3 x 10	5 x 25	310.0	88.0	60.0	435-01662

Subject to technical changes.