




Cable Ties for thin-walled bundles

• OS-Series

OS-Series cable ties are used in many areas where thin-walled or soft insulation wires and cable are being installed, e. g. automotive and aircraft industry. OS ties made from PA66V0 material are suitable for applications where safety regulations are required, e.g. reduction of smoke and dangerous gases.

Features and Benefits


- Outside serrated cable tie with smooth surface to the bundle
- Tie follows the contours of the cable bundle perfectly
- Takes up less space due to curved head
- Easy insertion and high tensile strength
- For higher temperature or Limited Fire Hazard demand: Material PA46 or PA66V0
- Easy application either manually or with a processing tool

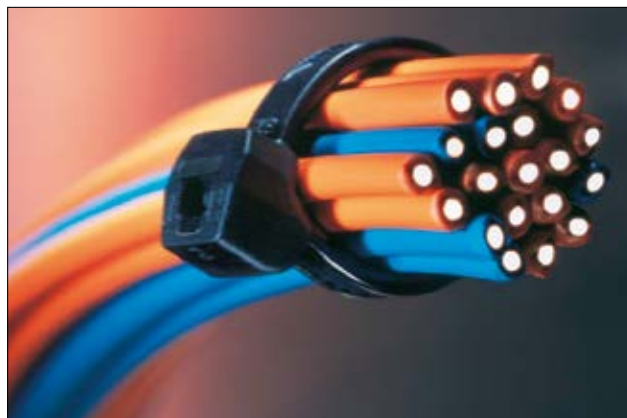

The contoured head needs less installation space, provides low insertion force and offers high strength.



The new head design of the OS Series



Application tools
please see page 338.

TYPE	Width (W)	Length (L)	Bundle Ø min.	Bundle Ø max.	N	Material	Colour	Pack Cont.	Article-No.
T18ROS	2.5	100.0	1.6	20.0	80	PA66HS	Black (BK)	500	118-04701
	2.5	100.0	1.6	20.0	80	PA66HS	Natural (NA)	1,000	118-00035
	2.5	100.0	1.6	20.0	80	PA66V0-HOI	White (WH)	100	118-00079
T30ROS	3.4	145.0	1.6	35.0	135	PA66HS	Natural (NA)	100	118-00064
	3.4	145.0	1.6	35.0	135	PA66HS	Black (BK)	100	118-04800
T30LOS	3.4	200.0	1.6	50.0	135	PA66HS	Natural (NA)	100	118-00044
	3.4	200.0	1.6	50.0	135	PA66V0-HOI	White (WH)	100	118-00080
	3.4	200.0	1.6	50.0	135	PA66HS	Black (BK)	100	118-04900
T50SOS	4.6	150.0	1.6	35.0	225	PA66HS	Black (BK)	100	118-05850
T50ROS	4.6	200.0	1.6	50.0	225	PA46	Grey (GY)	500	118-05078
	4.6	200.0	1.6	50.0	225	PA66	Natural (NA)	1000	118-00096
	4.6	200.0	1.6	50.0	225	PA66HS	Black (BK)	500	118-05040
	4.6	200.0	1.6	50.0	225	PA66HS	Black (BK)	1000	118-00093
	4.6	200.0	1.6	50.0	225	PA66HS	Natural (NA)	1000	118-00097
	4.6	200.0	1.6	50.0	225	PA66HS	Natural (NA)	100	118-05059
T50MOS	4.6	245.0	1.6	66.0	225	PA66HS	Black (BK)	100	118-00018
	4.6	245.0	1.6	66.0	225	PA66HS	Natural (NA)	100	118-00055
	4.6	245.0	1.6	66.0	225	PA66V0-HOI	White (WH)	100	118-00081
T50LOS	4.6	384.0	1.6	110.0	225	PA66HS	Black (BK)	100	118-05900
T120ROS	7.6	385.0	5.0	105.0	535	PA66HS	Black (BK)	100	118-00066
	7.6	385.0	5.0	105.0	535	PA66HS	Natural (NA)	100	118-00067
	7.6	385.0	5.0	105.0	535	PA66V0-HOI	White (WH)	100	118-00082

All dimensions in mm. Subject to technical changes.

Minimum Order Quantity (MOQ) may differ from package content. Other packaging options may also be available.