


Technical data sheet

Article number:
156-01561

T120ROSFT9CLG

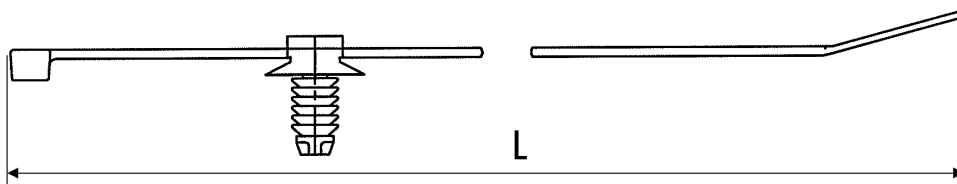

Product Group	2-piece fixing ties with fir tree, with disc, for round holes
Product Family	Fir tree parts FT9
Material	Polyamide 6.6, heat stabilised (PA66HS), Polyamide 6.6, high impact modified, heat and UV-stabilised (PA66HIRHSUV)
Colour	Black (BK)
Application Tool	ProCut 9 no battery, EVOcut, MK9P, MK9P w/ Upper air, MK10-SB, MK21, EVO9, EVO9SP, EVO9HT, EVO9i, EVO9iSP, EVO9iHT
Bundle Ø max.	105.0 mm
Bundle Ø min.	5.0 mm
Cable Tie	Polyamide 6.6, heat stabilised (PA66HS)
CE Certification	No
Fixation Method	Fir tree for round holes
Flammability	UL 94 HB
for Hole Ø (FH)	8.75 - 9.25 mm
Height (H)	29.6 mm
Length (L)	385.0 mm
Min.Tensile Strength	535 N
Operating Temperature	-40 °C to +105 °C
Package Content packed in	pack
Pack Cont.	100 pc.
Panel Thickness	12.7 mm
Panel Thickness max.	1.0 - 12.7 mm
Panel Thickness min. (metric)	1.0 mm
ROHS compliant	Yes
Thickness (T)	1.8 mm
Variant	Outside Serrated
Width (W)	7.6 mm



