


## Technical data sheet

Article number:  
156-02227

**T50REC5A**

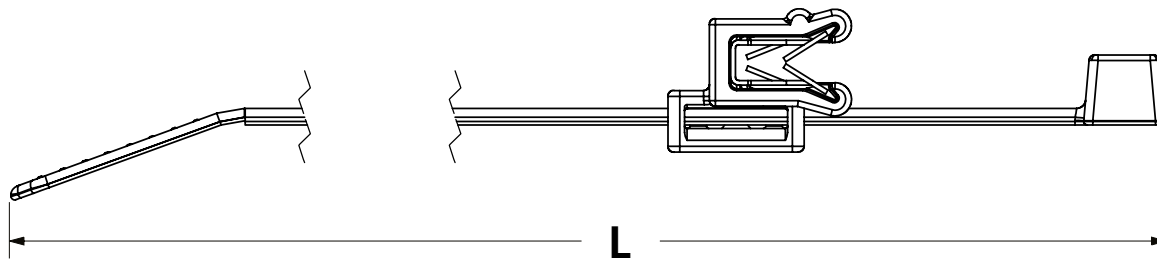

|                                      |                                                                                                                                                                           |
|--------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Product Group</b>                 | 2-piece fixing ties for edges                                                                                                                                             |
| <b>Product Family</b>                | EdgeClip-Series, 1.0 - 3.0 mm, side fixing                                                                                                                                |
| <b>Material</b>                      | Polyamide 6.6, high impact modified, heat and UV-stabilised, proprietary blend (PA66HIRHSUVR5), Polyamide 6.6, high impact modified, heat and UV-stabilised (PA66HIRHSUV) |
| <b>Colour</b>                        | Black (BK)                                                                                                                                                                |
| <b>Application Tool</b>              | ProCut 9 no battery, MK3PNSP2, EVOcut, MK7P, MK10-SB, MK20, EVO7, EVO7SP, EVO7i, EVO7iSP, EVO9, EVO9SP, EVO9i, EVO9iSP                                                    |
| <b>Bundle Ø max.</b>                 | 50.0 mm                                                                                                                                                                   |
| <b>Bundle Ø min.</b>                 | 5.0 mm                                                                                                                                                                    |
| <b>Cable Tie</b>                     | Polyamide 6.6, high impact modified, heat and UV-stabilised (PA66HIRHSUV)                                                                                                 |
| <b>CE Certification</b>              | No                                                                                                                                                                        |
| <b>Fixation Method</b>               | Edge Clip                                                                                                                                                                 |
| <b>Flammability</b>                  | UL 94 HB                                                                                                                                                                  |
| <b>Foot Part</b>                     | Polyamide 6.6, high impact modified, heat and UV-stabilised, proprietary blend (PA66HIRHSUVR5)                                                                            |
| <b>Height (H)</b>                    | 15.5 mm                                                                                                                                                                   |
| <b>Length (L)</b>                    | 203.2 mm                                                                                                                                                                  |
| <b>Length (L2)</b>                   | 14.0 mm                                                                                                                                                                   |
| <b>Min.Tensile Strength</b>          | 89 N                                                                                                                                                                      |
| <b>Operating Temperature</b>         | -40 °C to +115 °C, -40 °C to +110 °C                                                                                                                                      |
| <b>Package Content packed in</b>     | pack                                                                                                                                                                      |
| <b>Pack Cont.</b>                    | 500 pcs.                                                                                                                                                                  |
| <b>Panel Thickness</b>               | 3.0 mm                                                                                                                                                                    |
| <b>Panel Thickness max.</b>          | 1.0 - 3.0 mm                                                                                                                                                              |
| <b>Panel Thickness min. (metric)</b> | 1.0 mm                                                                                                                                                                    |
| <b>ROHS compliant</b>                | Yes                                                                                                                                                                       |
| <b>Thickness (T)</b>                 | 1.2 mm                                                                                                                                                                    |
| <b>UL-File Number</b>                | E64139                                                                                                                                                                    |

|           |                 |
|-----------|-----------------|
| Variant   | Inside Serrated |
| Width (W) | 4.6 mm          |

