


Technical data sheet

Article number:
156-04030

T50RFT8

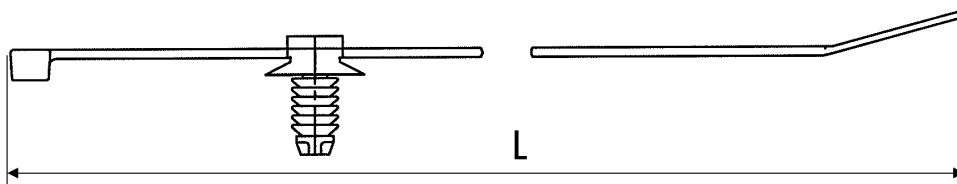

Product Group	2-piece fixing ties with fir tree, with disc, for round holes
Product Family	Fir tree parts FT8
Material	Polyamide 6.6, high impact modified, heat stabilised (PA66HIRHS), Polyamide 6.6, heat stabilised (PA66HS)
Colour	Orange (OG), High Voltage (HV), Black (BK)
Application Tool	ProCut 9 no battery, MK3PNSP2, EVOcut, MK7P, MK10-SB, MK20, EVO7, EVO7SP, EVO7i, EVO7iSP, EVO9, EVO9SP, EVO9i, EVO9iSP
Bundle Ø max.	50.0 mm
Bundle Ø min.	5.0 mm
Cable Tie	Polyamide 6.6, high impact modified, heat stabilised (PA66HIRHS)
CE Certification	No
Fixation Method	Fir tree for round holes
Flammability	UL 94 HB
for Hole Ø (FH)	7.7 - 8.0 mm
Height (H)	1.2 mm
Length (L)	202 mm
Length (L2)	12.0 mm
Min.Tensile Strength	225 N
Operating Temperature	-40 °C to +110 °C
Package Content packed in	pack
Pack Cont.	500 pcs.
Panel Thickness	6.0 mm
Panel Thickness max.	0.8 - 6.0 mm
Panel Thickness min. (metric)	0.8 mm
ROHS compliant	Yes
Thickness (T)	1.2 mm
Variant	Inside Serrated
Width (W)	4.6 mm



