


## Technical data sheet

Article number:  
157-00192

T50SOS2DOP62X122-E

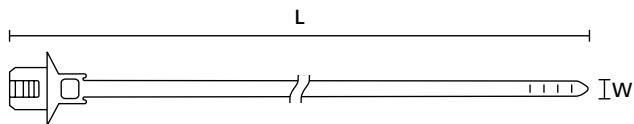

|                                      |                                                                        |
|--------------------------------------|------------------------------------------------------------------------|
| <b>Product Group</b>                 | 1-piece fixing ties with fir tree, with disc                           |
| <b>Product Family</b>                | for oval holes                                                         |
| <b>Material</b>                      | Polyamide 4.6 (PA46)                                                   |
| <b>Colour</b>                        | Grey (GY)                                                              |
| <b>Application Tool</b>              | MK3PNSP2, EVOcut, MK7P, MK10-SB, MK20, EVO7SP, EVO7i, EVO7iSP, FTS_pro |
| <b>Bundle Ø max.</b>                 | 35.0 mm                                                                |
| <b>Bundle Ø min.</b>                 | 1.0 mm                                                                 |
| <b>Fixation Method</b>               | Fir Tree for oval holes                                                |
| <b>Flammability</b>                  | UL 94 V2                                                               |
| <b>for Hole Ø (FH)</b>               | 6.2 x 12.2 mm                                                          |
| <b>Height (H)</b>                    | 10.5 mm                                                                |
| <b>Length (L)</b>                    | 164.0 mm                                                               |
| <b>Min.Tensile Strength</b>          | 200 N                                                                  |
| <b>Operating Temperature</b>         | -40 °C to +135 °C, (+140 °C, 500 h)                                    |
| <b>Package Content packed in</b>     | bag                                                                    |
| <b>Pack Cont.</b>                    | 500 pcs.                                                               |
| <b>Panel Thickness</b>               | 6.0 mm                                                                 |
| <b>Panel Thickness max.</b>          | 0.6 – 6.0 mm                                                           |
| <b>Panel Thickness min. (metric)</b> | 0.6 mm                                                                 |
| <b>ROHS compliant</b>                | Yes                                                                    |
| <b>Thickness (T)</b>                 | 1.3 mm                                                                 |
| <b>Variant</b>                       | Outside Serrated                                                       |
| <b>Width (W)</b>                     | 4.6 mm                                                                 |

