


## Technical data sheet

Article number:  
157-00232

T50ROSFTOVALR

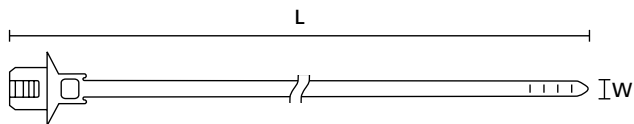

|                                      |                                                                                                                                           |
|--------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Product Group</b>                 | 1-piece fixing ties with fir tree, with disc                                                                                              |
| <b>Product Family</b>                | for oval holes                                                                                                                            |
| <b>Material</b>                      | Polyamide 6.6, high impact modified, heat and UV-stabilised (PA66HIRHSUV)                                                                 |
| <b>Colour</b>                        | Black (BK)                                                                                                                                |
| <b>Application Tool</b>              | ProCut 9 no battery, EVOcut, MK9P, MK9P w/ Upper air, MK10-SB, MK21, EVO7, EVO7SP, EVO7iSP, EVO9, EVO9SP, EVO9HT, EVO9i, EVO9iSP, EVO9iHT |
| <b>Bundle Ø max.</b>                 | 50.0 mm                                                                                                                                   |
| <b>Bundle Ø min.</b>                 | 2.0 mm                                                                                                                                    |
| <b>CE Certification</b>              | No                                                                                                                                        |
| <b>Fixation Method</b>               | Fir Tree for oval holes                                                                                                                   |
| <b>Flammability</b>                  | UL 94 HB                                                                                                                                  |
| <b>for Hole Ø (FH)</b>               | 6.2 x 12.2 mm, 6.5 x 12.5 mm, 6.5 x 13.0 mm, 7.0 x 12.0 mm                                                                                |
| <b>Height (H)</b>                    | 13.15 mm                                                                                                                                  |
| <b>Length (L)</b>                    | 218.44 mm                                                                                                                                 |
| <b>Min.Tensile Strength</b>          | 222.4 N                                                                                                                                   |
| <b>Operating Temperature</b>         | -40 °C to +105 °C                                                                                                                         |
| <b>Package Content packed in</b>     | pack                                                                                                                                      |
| <b>Pack Cont.</b>                    | 500 pcs.                                                                                                                                  |
| <b>Panel Thickness</b>               | 6.0 mm                                                                                                                                    |
| <b>Panel Thickness max.</b>          | 0.6 - 6.0 mm                                                                                                                              |
| <b>Panel Thickness min. (metric)</b> | 0.6 mm                                                                                                                                    |
| <b>ROHS compliant</b>                | Yes                                                                                                                                       |
| <b>Thickness (T)</b>                 | 1.5 mm                                                                                                                                    |
| <b>Variant</b>                       | Outside Serrated                                                                                                                          |
| <b>Width (W)</b>                     | 5.1 mm                                                                                                                                    |

