


Technical data sheet

Article number:
157-00296

T50SOSFT6.5LG-E4

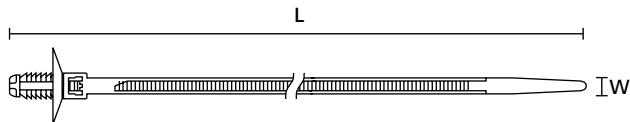

Product Group	1-piece fixing ties with fir tree, with disc, for round holes
Product Family	Fir tree parts FT6
Material	Polyamide 6.6, high impact modified, heat and UV-stabilised (PA66HIRHSUV)
Colour	Black (BK)
Application Tool	ProCut 9 no battery, MK3PNSP2, EVOcut, MK7P, MK10-SB, MK20, EVO7, EVO7SP, EVO7i, EVO7iSP, EVO9, EVO9SP, EVO9i, EVO9iSP, FTS_pro
Bundle Ø max.	35.0 mm
Bundle Ø min.	1.0 mm
CE Certification	No
Fixation Method	Fir tree for round holes
Flammability	UL 94 HB
for Hole Ø (FH)	6.35 mm (hexagonal), 6.5 mm
Height (H)	1.3 mm
Length (L)	167.9 mm
Min.Tensile Strength	225 N
Operating Temperature	-40 °C to +105 °C
Package Content packed in	pack
Pack Cont.	4000 pcs.
Panel Thickness	8.25 mm
Panel Thickness max.	0.6 - 8.25 mm
Panel Thickness min. (metric)	0.6 mm
ROHS compliant	Yes
Thickness (T)	1.3 mm
Width (W)	4.6 mm

RoHS ✓