


## Technical data sheet

Article number:  
169-22290

IWS29

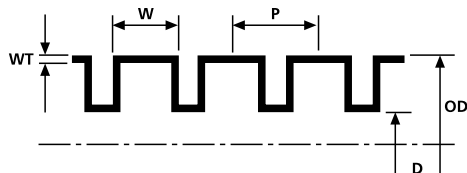

|                                  |                                  |
|----------------------------------|----------------------------------|
| <b>Product Group</b>             | Non-Metallic Conduits            |
| <b>Product Family</b>            | IWS Polyamide 6                  |
| <b>Material</b>                  | Polyamide 6 (PA6)                |
| <b>Colour</b>                    | Black (BK)                       |
| <b>Bending Radius min. (R)</b>   | 65 mm                            |
| <b>Diameter (D)</b>              | 29.0 mm                          |
| <b>Flammability</b>              | UL 94 HB, FMVSS 302              |
| <b>Halogen-free</b>              | Yes                              |
| <b>Inside Ø (ID)</b>             | 29.0 mm                          |
| <b>Length (L)</b>                | 25 m                             |
| <b>Nominal Ø</b>                 | 29 mm                            |
| <b>Operating Temperature</b>     | -40 °C to +120 °C                |
| <b>Outside Ø (OD)</b>            | 34.5 mm                          |
| <b>Package Content packed in</b> | metre                            |
| <b>Pack Cont.</b>                | 25 m                             |
| <b>Specifications</b>            | ANSI/UL 1696, csa-C22.2 No.227.3 |
| <b>UL-File Number</b>            | E325250                          |

