


## Technical data sheet

Article number:  
317-10300

TA30 3/1

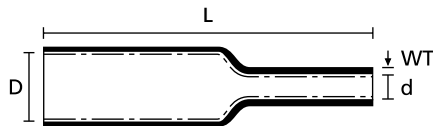

<b>Product Group</b>	Heat shrinkable tubing, adhesive lined - 1.2 m length
<b>Product Family</b>	TA30 thin wall, 3:1 shrink ratio
<b>Material</b>	Polyolefin, cross-linked (PO-X)
<b>Colour</b>	Black (BK)
<b>Adhesive</b>	Hot melt adhesive
<b>Behaviour at Heat Shock</b>	not cracking, not dripping, not fluid
<b>Behaviour At Low Temperature</b>	not cracking
<b>Dielectric Strength [Test method]</b>	11.8 kV/mm [ASTM D2671]
<b>Elongation at break [Test method]</b>	>350% [ASTM D638]
<b>Flammability</b>	ASTM D2671 B
<b>Heat Aging Test [Test method]</b>	168h/175°C [SAE-AS23053]
<b>Heat Shock Test</b>	4h/225°C
<b>Longitudinal Change After Shrinkage</b>	-7% max.
<b>Min. Shrink Temperature - °C</b>	+110 °C
<b>Operating Temperature</b>	-55 °C to +110 °C, (outer wall only)
<b>Recov. Ø d max.</b>	1.0 mm
<b>Shrink Ratio</b>	3:1
<b>Supplied Ø D min.</b>	3.0 mm
<b>Tensile Strength [Test method]</b>	16 MPa [ASTM D638]
<b>Wall (WT)</b>	0.95 mm

