


Technical data sheet

Article number:
317-10450

TA30 4.5/1.5

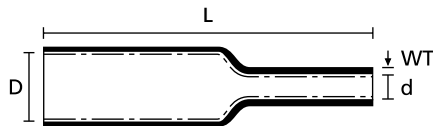

Product Group	Heat shrinkable tubing, adhesive lined - 1.2 m length
Product Family	TA30 thin wall, 3:1 shrink ratio
Material	Polyolefin, cross-linked (PO-X)
Colour	Black (BK)
Adhesive	Hot melt adhesive
Behaviour at Heat Shock	not cracking, not dripping, not fluid
Behaviour At Low Temperature	not cracking
Dielectric Strength [Test method]	11.8 kV/mm [ASTM D2671]
Elongation at break [Test method]	>350% [ASTM D638]
Flammability	ASTM D2671 B
Heat Aging Test [Test method]	168h/175°C [SAE-AS23053]
Heat Shock Test	4h/225°C
Longitudinal Change After Shrinkage	-7% max.
Min. Shrink Temperature - °C	+110 °C
Operating Temperature	-55 °C to +110 °C, (outer wall only)
Recov. Ø d max.	1.5 mm
Shrink Ratio	3:1
Supplied Ø D min.	4.5 mm
Tensile Strength [Test method]	16 MPa [ASTM D638]
Wall (WT)	1.10 mm

RoHS