


## Technical data sheet

Article number:  
317-10600

TA30 6/2

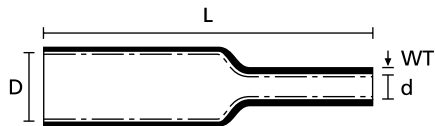

|                                     |   |
|-------------------------------------|---|
| Product Group                       | Heat shrinkable tubing, adhesive lined - 1.2 m length |
| Product Family                      | TA30 thin wall, 3:1 shrink ratio                      |
| Material                            | Polyolefin, cross-linked (PO-X)                       |
| Colour                              | Black (BK)  |
| Adhesive                            | Hot melt adhesive                                     |
| Behaviour at Heat Shock             | not cracking, not dripping, not fluid                 |
| Behaviour At Low Temperature        | not cracking  |
| Dielectric Strength [Test method]   | 11.8 kV/mm [ASTM D2671]                               |
| Elongation at break [Test method]   | >350% [ASTM D638]                                     |
| Flammability                        | ASTM D2671 B  |
| Heat Aging Test [Test method]       | 168h/175°C [SAE-AS23053]                              |
| Heat Shock Test                     | 4h/225°C  |
| Longitudinal Change After Shrinkage | -7% max.  |
| Min. Shrink Temperature - °C        | +110 °C   |
| Operating Temperature               | -55 °C to +110 °C, (outer wall only)                  |
| Recov. Ø d max.                     | 2.0 mm  |
| Shrink Ratio                        | 3:1   |
| Supplied Ø D min.                   | 6.0 mm  |
| Tensile Strength [Test method]      | 16 MPa [ASTM D638]                                    |
| Wall (WT)                           | 1.20 mm   |

