


Technical data sheet

Article number:
317-31201

TA30 12/4

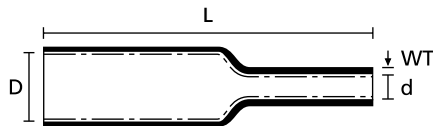

| | |
|--|---|
| Product Group | Heat shrinkable tubing, adhesive lined - 1.2 m length |
| Product Family | TA30 thin wall, 3:1 shrink ratio |
| Material | Polyolefin, cross-linked (PO-X) |
| Colour | Black (BK) |
| Adhesive | Hot melt adhesive |
| Behaviour at Heat Shock | not cracking, not dripping, not fluid |
| Behaviour At Low Temperature | not cracking |
| Dielectric Strength [Test method] | 11.8 kV/mm [ASTM D2671] |
| Elongation at break [Test method] | >350% [ASTM D638] |
| Flammability | ASTM D2671 B |
| Heat Aging Test [Test method] | 168h/175°C [SAE-AS23053] |
| Heat Shock Test | 4h/225°C |
| Longitudinal Change After Shrinkage | -7% max. |
| Min. Shrink Temperature - °C | +110 °C |
| Operating Temperature | -55 °C to +110 °C, (outer wall only) |
| Recov. Ø d max. | 4.0 mm |
| Shrink Ratio | 3:1 |
| Supplied Ø D min. | 12.0 mm |
| Tensile Strength [Test method] | 16 MPa [ASTM D638] |
| Wall (WT) | 1.40 mm |

