


## Technical data sheet

Article number:  
317-51200

TA30 12/4

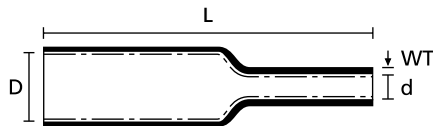

|  |   |
|--|---|
| <b>Product Group</b>                       | Heat shrinkable tubing, adhesive lined - 1.2 m length |
| <b>Product Family</b>                      | TA30 thin wall, 3:1 shrink ratio                      |
| <b>Material</b>                            | Polyolefin, cross-linked (PO-X)                       |
| <b>Colour</b>                              | Black (BK)  |
| <b>Adhesive</b>                            | Hot melt adhesive                                     |
| <b>Behaviour at Heat Shock</b>             | not cracking, not dripping, not fluid                 |
| <b>Behaviour At Low Temperature</b>        | not cracking  |
| <b>Dielectric Strength [Test method]</b>   | 11.8 kV/mm [ASTM D2671]                               |
| <b>Elongation at break [Test method]</b>   | >350% [ASTM D638]                                     |
| <b>Flammability</b>                        | ASTM D2671 B  |
| <b>Heat Aging Test [Test method]</b>       | 168h/175°C [SAE-AS23053]                              |
| <b>Heat Shock Test</b>                     | 4h/225°C  |
| <b>Longitudinal Change After Shrinkage</b> | -7% max.  |
| <b>Min. Shrink Temperature - °C</b>        | +110 °C   |
| <b>Operating Temperature</b>               | -55 °C to +110 °C, (outer wall only)                  |
| <b>Recov. Ø d max.</b>                     | 4.0 mm  |
| <b>Shrink Ratio</b>                        | 3:1   |
| <b>Supplied Ø D min.</b>                   | 12.0 mm   |
| <b>Tensile Strength [Test method]</b>      | 16 MPa [ASTM D638]                                    |
| <b>Wall (WT)</b>                           | 1.40 mm   |

