


Technical data sheet

Article number:
318-30450

TA32-4.5/1.5

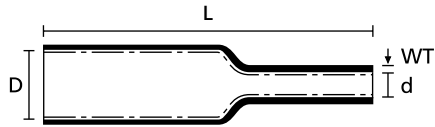

Product Group	Heat shrinkable tubing adhesive lined - 1.2 m lengths
Product Family	TA32 - thin wall, 3:1 shrink ratio
Material	Polyolefin, cross-linked (PO-X)
Colour	Black (BK)
Adhesive	Hot melt adhesive
Behaviour at Heat Shock	not cracking, not dripping, not fluid
Dielectric Strength [Test method]	25 kV/mm [ASTM D876]
Elongation at break [Test method]	350% [ASTM D638]
Flammability	UL 224 VW-1
Heat Shock Test	4h/250°C
Longitudinal Change After Shrinkage	-15% max.
Min. Shrink Temperature - °C	+110 °C
Operating Temperature	-55 °C to +125 °C
Package Content packed in	pcs.
Pack Cont.	250 pcs.
Recov. Ø d max.	1.5 mm
Shrink Ratio	3:1
Specifications	ANSI/UL 224, C22.2 no. 198.1-99
Supplied Ø D min.	4.8 mm
Tensile Strength [Test method]	15 MPa [ASTM D638]
UL-File Number	E198023
Wall (WT)	1.10 mm

RoHS

