


Technical data sheet

Article number:
318-31201

TA32-12/4

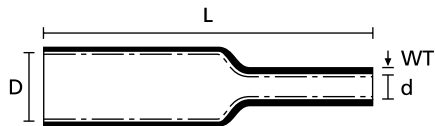

| | |
|--|---|
| Product Group | Heat shrinkable tubing adhesive lined - 1.2 m lengths |
| Product Family | TA32 - thin wall, 3:1 shrink ratio |
| Material | Polyolefin, cross-linked (PO-X) |
| Colour | Red (RD) |
| Adhesive | Hot melt adhesive |
| Behaviour at Heat Shock | not cracking, not dripping, not fluid |
| Dielectric Strength [Test method] | 25 kV/mm [ASTM D876] |
| Elongation at break [Test method] | 350% [ASTM D638] |
| Flammability | UL 224 VW-1 |
| Heat Shock Test | 4h/250°C |
| Longitudinal Change After Shrinkage | -15% max. |
| Min. Shrink Temperature - °C | +110 °C |
| Operating Temperature | -55 °C to +125 °C |
| Recov. Ø d max. | 4.0 mm |
| Shrink Ratio | 3:1 |
| Specifications | UL 224 125 °C 600V, CSA C22.2 no. 198.1-99 |
| Supplied Ø D min. | 12.7 mm |
| Tensile Strength [Test method] | 15 MPa [ASTM D638] |
| Wall (WT) | 1.40 mm |

