


## Technical data sheet

Article number:  
318-45200

TA42-52/13

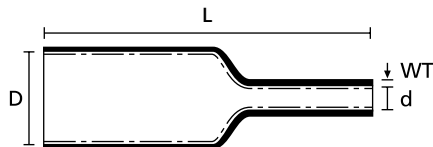

<b>Product Group</b>	Heat shrinkable tubing adhesive lined - 1.2 m lengths
<b>Product Family</b>	TA42 - thin wall, 4:1 shrink ratio
<b>Material</b>	Polyolefin, cross-linked (PO-X)
<b>Colour</b>	Black (BK)
<b>Adhesive</b>	Hot melt adhesive
<b>Behaviour at Heat Shock</b>	not cracking, not dripping, not fluid
<b>Dielectric Strength [Test method]</b>	20 kV/mm [ASTM D876]
<b>Elongation at break [Test method]</b>	350% [ASTM D638]
<b>Flammability</b>	UL 224 VW-1
<b>Heat Shock Test</b>	4h/250°C
<b>Min. Shrink Temperature - °C</b>	+110 °C
<b>Operating Temperature</b>	-55 °C to +125 °C
<b>Package Content packed in</b>	pcs.
<b>Pack Cont.</b>	10 pcs.
<b>Recov. Ø d max.</b>	13.0 mm
<b>Shrink Ratio</b>	4:1
<b>Specifications</b>	ANSI/UL 224
<b>Supplied Ø D min.</b>	52.0 mm
<b>Tensile Strength [Test method]</b>	15 MPa [ASTM D638]
<b>UL-File Number</b>	E198023
<b>Wall (WT)</b>	2.55 mm

RoHS✓

