


## Technical data sheet

Article number:  
318-50600

TA32-6/2

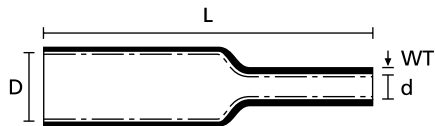

<b>Product Group</b>	Heat shrinkable tubing adhesive lined - 1.2 m lengths
<b>Product Family</b>	TA32 - thin wall, 3:1 shrink ratio
<b>Material</b>	Polyolefin, cross-linked (PO-X)
<b>Colour</b>	Black (BK)
<b>Adhesive</b>	Hot melt adhesive
<b>Behaviour at Heat Shock</b>	not cracking, not dripping, not fluid
<b>Dielectric Strength [Test method]</b>	25 kV/mm [ASTM D876]
<b>Elongation at break [Test method]</b>	350% [ASTM D638]
<b>Flammability</b>	UL 224 VW-1
<b>Heat Shock Test</b>	4h/250°C
<b>Longitudinal Change After Shrinkage</b>	-15% max.
<b>Min. Shrink Temperature - °C</b>	+110 °C
<b>Operating Temperature</b>	-55 °C to +125 °C
<b>Recov. Ø d max.</b>	2.0 mm
<b>Shrink Ratio</b>	3:1
<b>Specifications</b>	UL 224 125 °C 600V, CSA   C22.2 no. 198.1-99
<b>Supplied Ø D min.</b>	6.4 mm
<b>Tensile Strength [Test method]</b>	15 MPa [ASTM D638]
<b>Wall (WT)</b>	1.20 mm

