


## Technical data sheet

Article number:  
318-60108

TAN33-40

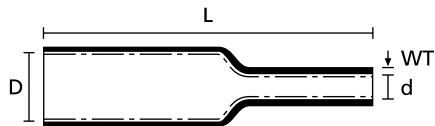

<b>Material</b>	Polyolefin, cross-linked (PO-X)
<b>Colour</b>	Black (BK)
<b>Behaviour At Low Temperature</b>	not cracking
<b>Dielectric Strength</b>	20 kV/mm
<b>Elongation at break</b>	3
<b>Longitudinal Change After Shrinkage</b>	+/-10% max
<b>Min. Shrink Temperature - °C</b>	+110 °C
<b>Operating Temperature</b>	-55 °C to +125 °C
<b>Recov. Ø d max.</b>	13.3 mm
<b>Shrink Ratio</b>	3:1
<b>Specifications</b>	CSA
<b>Supplied Ø D min.</b>	40.0 mm
<b>Tensile Strength</b>	12 MPa
<b>Wall (WT)</b>	2.40 mm

RoHS

