


Technical data sheet

Article number:
318-60151

TAN33-ST-4.8/1.5 BK

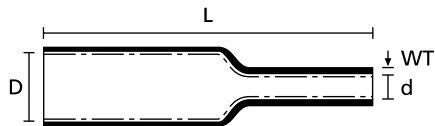

Material	Polyolefin, cross-linked (PO-X)
Colour	Black (BK)
Adhesive	Hot melt adhesive
Behaviour At Low Temperature	not cracking
Dielectric Strength	24 kV/mm
Elongation at break	400%
Flammability	UL 224 VW-1
Longitudinal Change After Shrinkage	10% max.
Min. Shrink Temperature - °C	+110 °C
Operating Temperature	-55 °C to +125 °C
Recov. Ø d max.	1.5 mm
Shrink Ratio	3:1
Specifications	CSA
Supplied Ø D min.	4.8 mm
Tensile Strength	12 MPa
UV-Stabilised	No
Wall (WT)	1.00 mm

RoHS

