


## Technical data sheet

Article number:  
318-60155

TAN33-ST-19/6 BK

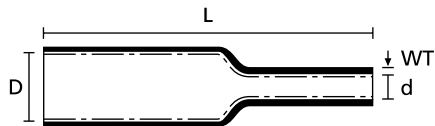

<b>Material</b>	Polyolefin, cross-linked (PO-X)
<b>Colour</b>	Black (BK)
<b>Adhesive</b>	Hot melt adhesive
<b>Behaviour At Low Temperature</b>	not cracking
<b>Dielectric Strength</b>	24 kV/mm
<b>Elongation at break</b>	400%
<b>Flammability</b>	UL 224 VW-1
<b>Longitudinal Change After Shrinkage</b>	10% max.
<b>Min. Shrink Temperature - °C</b>	+110 °C
<b>Operating Temperature</b>	-55 °C to +125 °C
<b>Recov. Ø d max.</b>	6.0 mm
<b>Shrink Ratio</b>	3:1
<b>Specifications</b>	CSA
<b>Supplied Ø D min.</b>	19.0 mm
<b>Tensile Strength</b>	12 MPa
<b>UV-Stabilised</b>	No
<b>Wall (WT)</b>	2.15 mm

RoHS

