


Technical data sheet

Article number:
323-10751

MU47-75/22

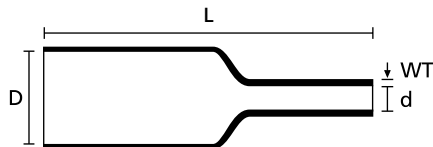

| | |
|---|--|
| Product Group | Heat shrinkable tubing up to 4:1 - 1 m lengths |
| Product Family | MU47 - medium wall unlined |
| Material | Polyolefin, cross-linked (PO-X) |
| Colour | Black (BK) |
| Behaviour at Heat Shock | not cracking, not fluid, not dripping |
| Behaviour at Low Temperature [Test method] | not cracking [ASTM D2671] |
| Dielectric Strength [Test method] | 15 kV/mm [IEC 60243] |
| Elongation at break [Test method] | 350 [ASTM D2671] |
| Elongation At Heat Aging | 300 % |
| Heat Aging Test [Test method] | 168h/150°C [ASTM D2671] |
| Heat Shock Test | 4h/225°C |
| Longitudinal Change After Shrinkage | -10% max. |
| Min. Shrink Temperature - °C | +120 °C |
| Minimum Tensile Strength At Heat Aging | 12 MPa |
| Operating Temperature | -55 °C to +110 °C |
| Recov. Ø d max. | 22.0 mm |
| Shrink Ratio | up to 4:1 |
| Supplied Ø D min. | 75.0 mm |
| Tensile Strength [Test method] | 12 MPa [ASTM D2671] |
| Wall (WT) | 3.0 mm |

