


## Technical data sheet

Article number:  
556-00850

RFID FLEXTAG 110x25

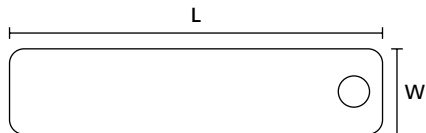

<b>Product Group</b>	Hard tags with RFID transponder
<b>Product Family</b>	FlexLine – Ultra high frequency (UHF), bolt-on, blank
<b>Material</b>	Thermoplastic Polyurethane (TPU)
<b>Colour</b>	Yellow (YE)
<b>Data Retention</b>	10 years
<b>Fixation Method</b>	bolt-on
<b>Frequency</b>	860-960 MHz (UHF)
<b>Length (L)</b>	110.00 mm
<b>Memory</b>	User memory: 512 bits, EPC: 96 bits, TID: 96 bits
<b>Operating Temperature</b>	-40 °C to +70 °C
<b>Package Content packed in</b>	pack
<b>Pack Cont.</b>	250 pcs.
<b>Print Method</b>	laser beam print
<b>Radio protocol</b>	ISO 18000-6C, EPC Gen2
<b>Resistance to</b>	Water: 100h (at room temperature), Salt mist: 100h (at room temperature), Petroleum: 100h (at room temperature), Mineral and vegetable oils: 100h (at room temperature)
<b>Specifications</b>	IEC 62262: IK06, IEC 68-2-29, IEC 68-2-6
<b>Storage Temperature</b>	-40 °C to +70 °C
<b>Type of RFID chip</b>	Alien Higgs 3
<b>Width (W)</b>	25.00 mm

