


Technical data sheet

Article number:
556-00852

HardTag Solid 60x18

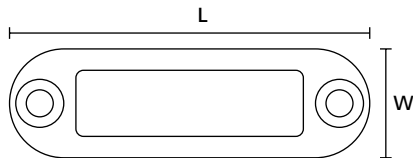

Product Group	Hard tags with RFID transponder
Product Family	ToughLine – Ultra high frequency (UHF), bolt-on, blank
Material	Acrylonitrile Butadiene Styrene alloyed with Polycarbonate (PC/ABS)
Colour	Grey (GY)
Data Retention	50 years
Fixation Method	bolt-on
Frequency	865-956 MHz (UHF)
Height (H)	8.00 mm
Length (L)	60.00 mm
Operating Temperature	-40 °C to +80 °C
Package Content packed in	pack
Pack Cont.	250 pcs.
Print Method	laser beam print
Radio protocol	ISO 18000-6C, EPC Gen2
Resistance to	Water: 100h (at room temperature), Salt mist: 100h (at room temperature), Petroleum: 100h (at room temperature), Mineral and vegetable oils: 100h (at room temperature)
Specifications	IEC 62262: IK07, IEC 68-2-29, IEC 68-2-6
Storage Temperature	-40 °C to +80 °C
Type of RFID chip	Impinj Monza R6
Width (W)	18.00 mm

