



2-Way Outlet Shapes, Breakout Boots


Helashrink 200 Series, in line, low voltage

Features and Benefits

- Easy, time-saving insulation of cable branch point where it splits into single wires
- Adhesive to relieve mechanical tension in cable harnesses



a: Expanded form (supplied)

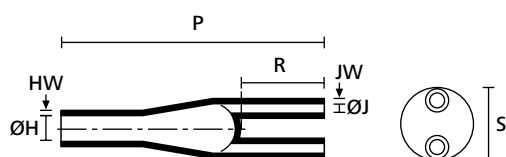

b: Fully recovered form (after heating)



223-2 supplied / fully recovered.

TYPE	ØH min. a	ØH max. b	ØJ min. a	ØJ max. b	P ± 10%	R ± 10%	HW ± 20%	JW ± 20%	S nom.	Article-No.
216-3-B8W	21.0	9.4	9.0	2.8	76.5	20.0	1.6	1.6	14.0	402-16039
223-2-B8W	33.0	9.4	17.5	4.1	94.0	30.0	1.5	1.2	20.0	402-23058
218-2-B8W	49.0	22.9	20.0	7.6	119.0	34.0	3.2	3.2	30.0	402-18051


All dimensions in mm. Subject to technical changes.

3-Way Outlet Shapes, Breakout Boots


Helashrink 300 Series, in line, low voltage

Features and Benefits

- Easy, time-saving insulation of cable branch point where it splits into single wires
- Adhesive is applied to relieve mechanical tension in cable harnesses

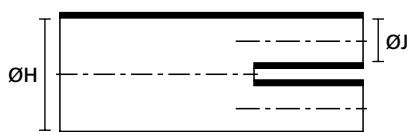

a: Expanded form (supplied)

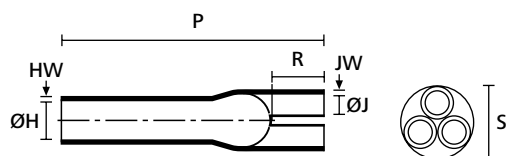

b: Fully recovered form (after heating)



300 Series supplied / fully recovered.

TYPE	ØH min. a	ØH max. b	ØJ min. a	ØJ max. b	P ± 10%	R ± 10%	HW ± 20%	JW ± 20%	S nom.	Article-No.
354-1-B8W	45.0	10.0	16.0	4.0	100.0	25.0	3.0	2.0	-	403-54004
320-1-B8W	55.8	22.5	30.4	9.0	180.0	44.0	3.0	2.0	37.0	403-20014
355-1-B8W2	100.0	28.0	40.0	13.0	210.0	50.0	3.5	2.5	-	403-55008
342-1-B8W2	110.0	35.0	40.0	17.5	230.0	45.0	4.0	3.5	65.0	403-42006

All dimensions in mm. Subject to technical changes.