






CATIA V5



Revision Level			Revision Record	Changed	Date	Approved	Date
Drawing	State	Part					
02.1	Design Release	A	SEE ECN# 013643	CJR	12/19/16	KVH	12/19/16

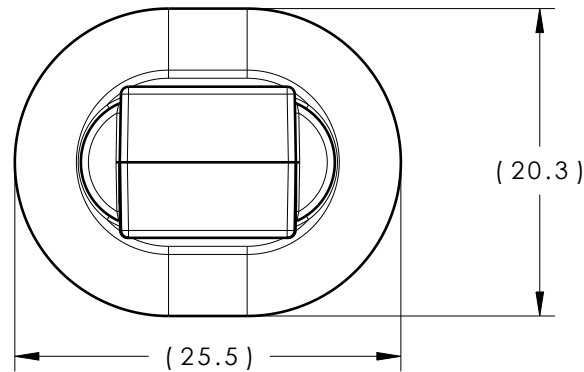

ISOMETRIC VIEW
SCALE 1:1

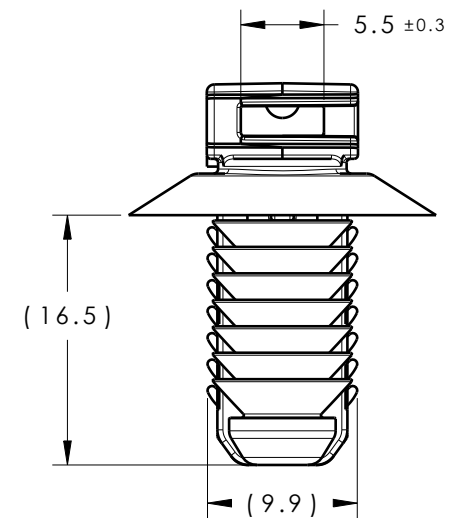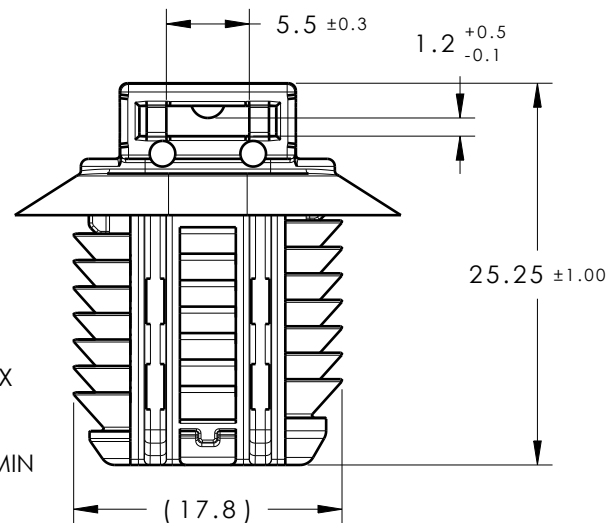

REFERENCE:

PERFORMANCE REQUIREMENTS:

1. FIR TREE PUSH IN FORCE: 65 NEWTONS (15 LBS) MAX IN EACH APPLICABLE NOMINAL OVAL HOLE SIZE AND A PLATE THICKNESS OF 1.8mm.
2. FIR TREE PULL OUT FORCE: 155 NEWTONS (35 LBS) MIN IN EACH APPLICABLE NOMINAL OVAL HOLE SIZE AND A PLATE THICKNESS OF 1.8mm.
3. SHEET METAL THICKNESS RANGE: 0.60mm - 9.50mm
4. APPLICABLE OVAL HOLE SIZES:
A. 9.0 X 17.0mm +/- 0.4
5. MAXIMUM PERCENT REGRIND PERMISSIBLE: 25%
6. MAX ALLOWABLE FLASH OR MISMATCH TO BE: 0.2mm ON FIR TREE, 0.5mm ON REST OF PART.

02.1

Material UROPPSFX72T6 COLOR: SILVER 02.1	Units millimeters	The copyright of this drawing is reserved by HellermannTyton. It is issued on condition that it is not reproduced, copied or disclosed to a third party, either wholly or in part, without the consent of HellermannTyton.	Drawn	CJR	1/6/16	Article/Type-No	FT9X17LGPPS/ 151-01535	Scale	2:1
	Tolerance defined on each dimension		Approved	KVH	1/6/16	Title CABLE TIE SLOT WITH 9mm X 17mm LG FIR TREE	Project Number 15-0876		
			HellermannTyton North America Email: corp@htamericas.com Web: www.hellermann.tyton.com						
						Drawing-No	PRODUCTION	Phase	Format
			15-0876-001-CSU			02.1	Sheet	1/1	