


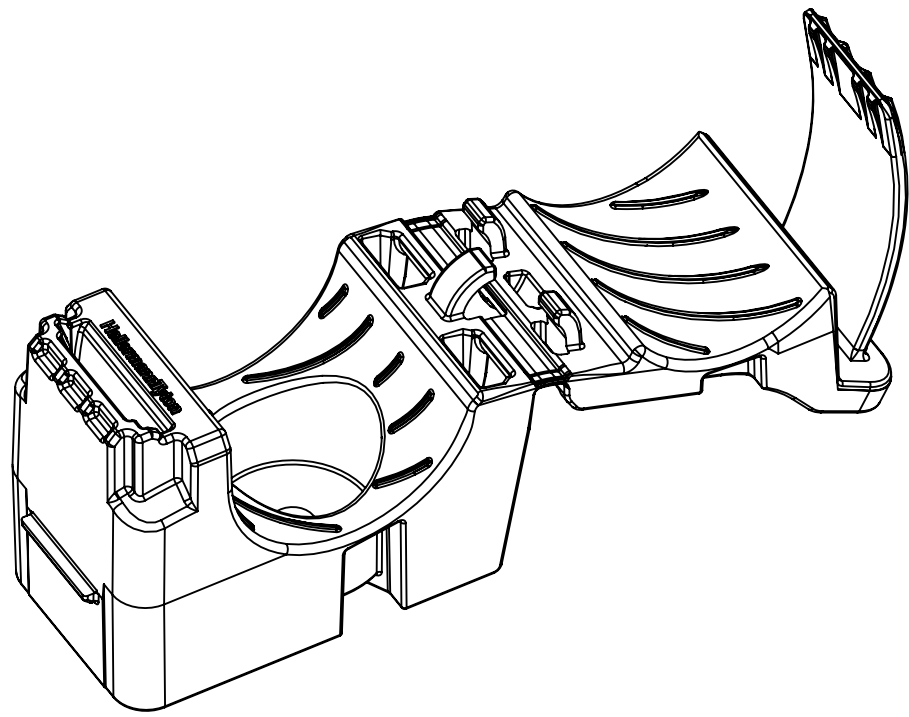
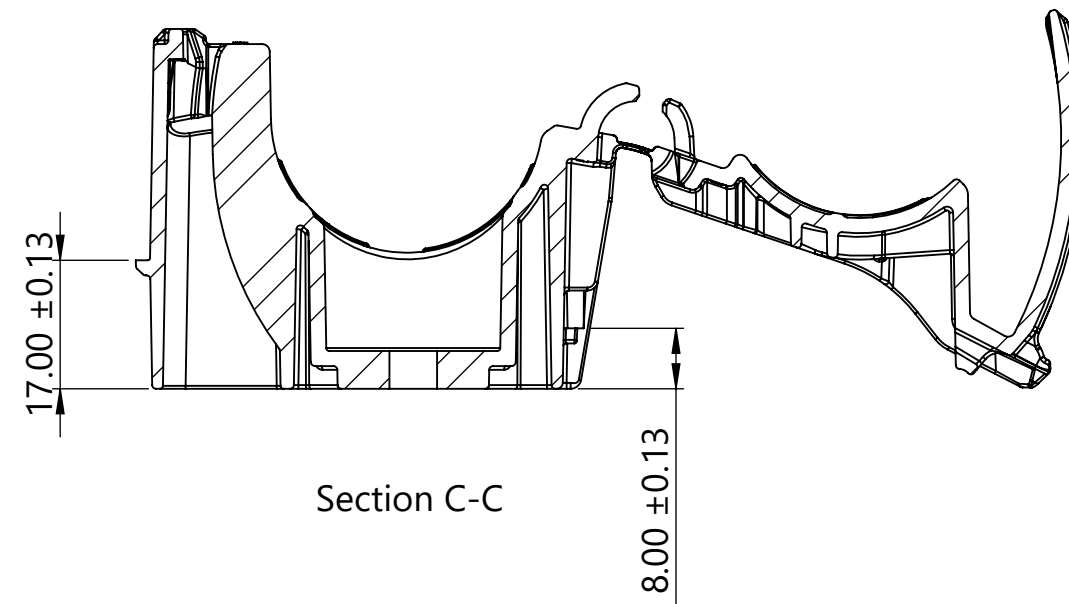


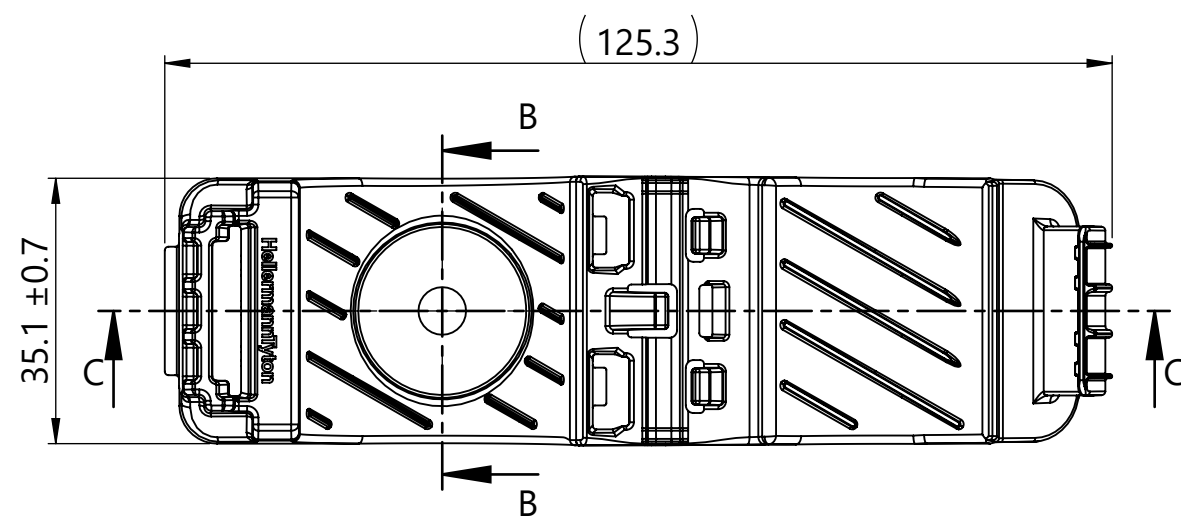


Isometric View
Product shipped in clamp open position

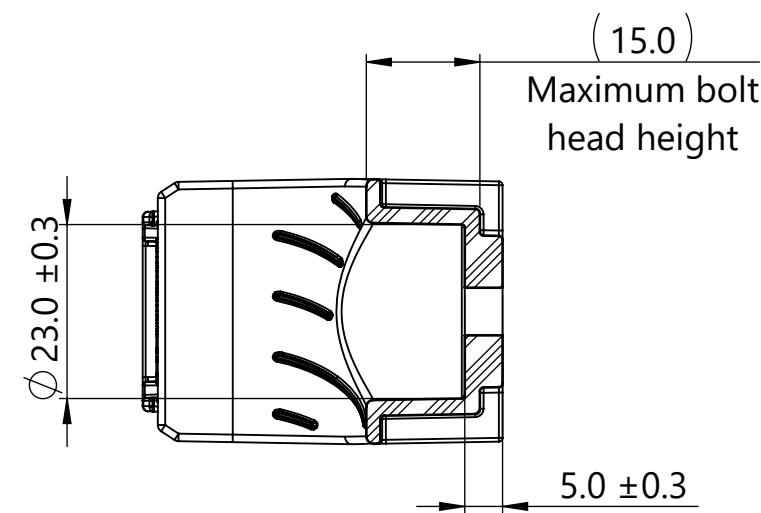


Section C-C

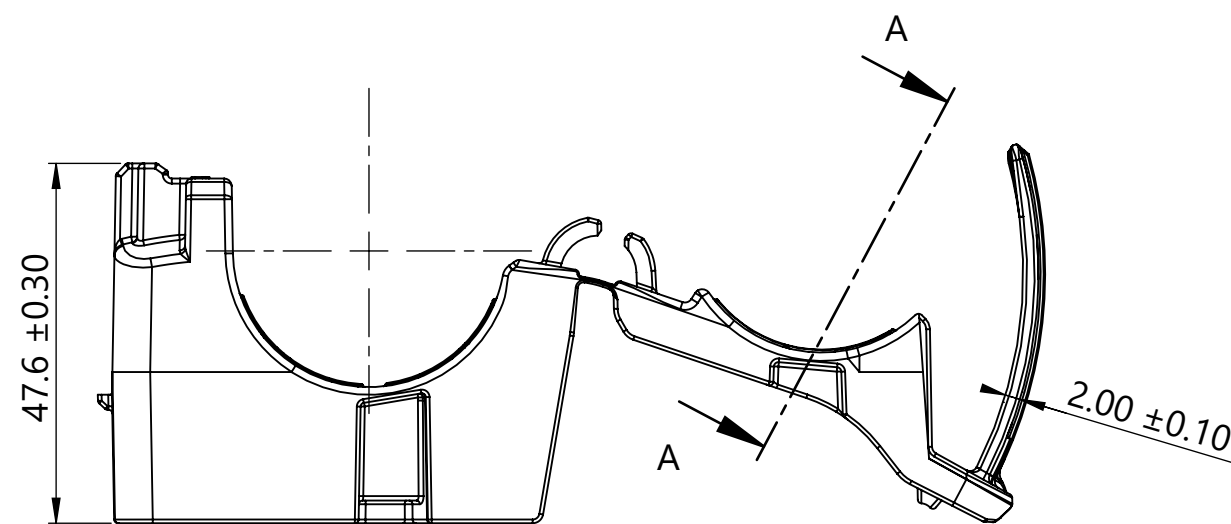

Section B-B

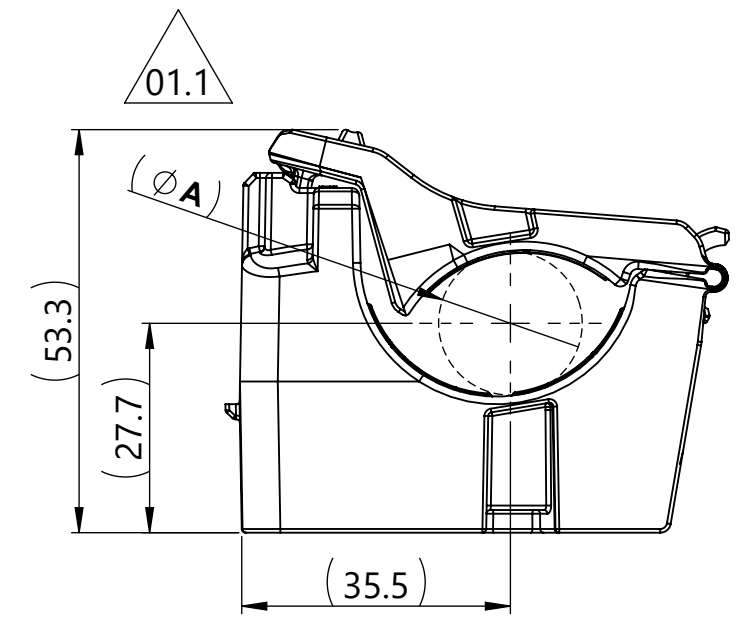



Minimum Bundle Diameter

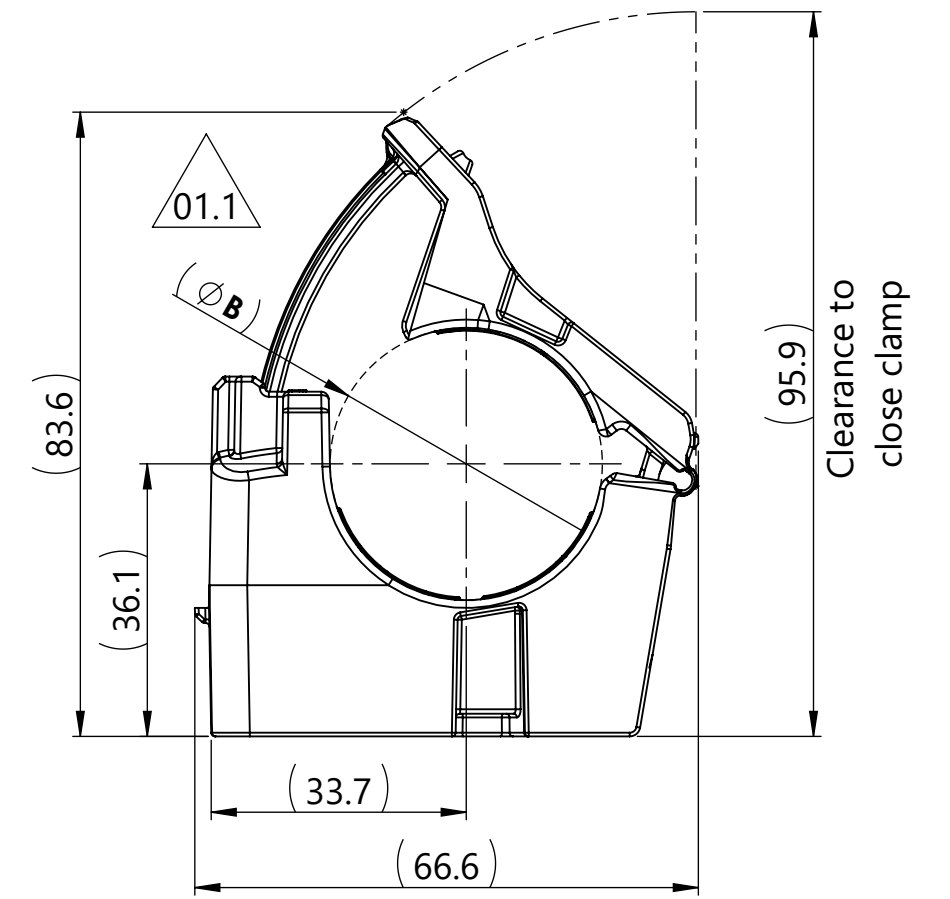

Maximum Bundle Diameter

Performance requirements:
Dry as molded with $\leq 0.5\%$ moisture content:

1. ITS-0001 Ratchet Clamp Split Mandrel Test:
1112 newtons [250 lbf] minimum at a nominal bundle diameter of 25.40 [1.000in]

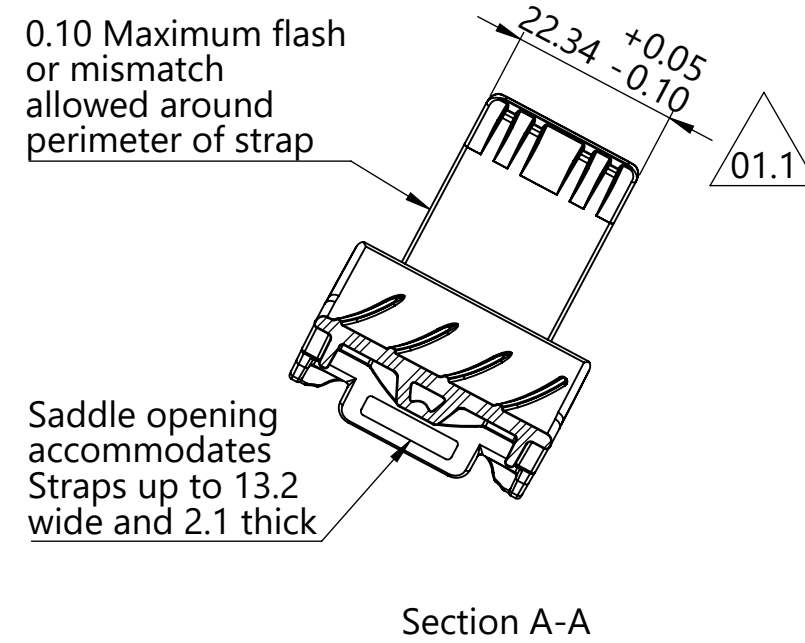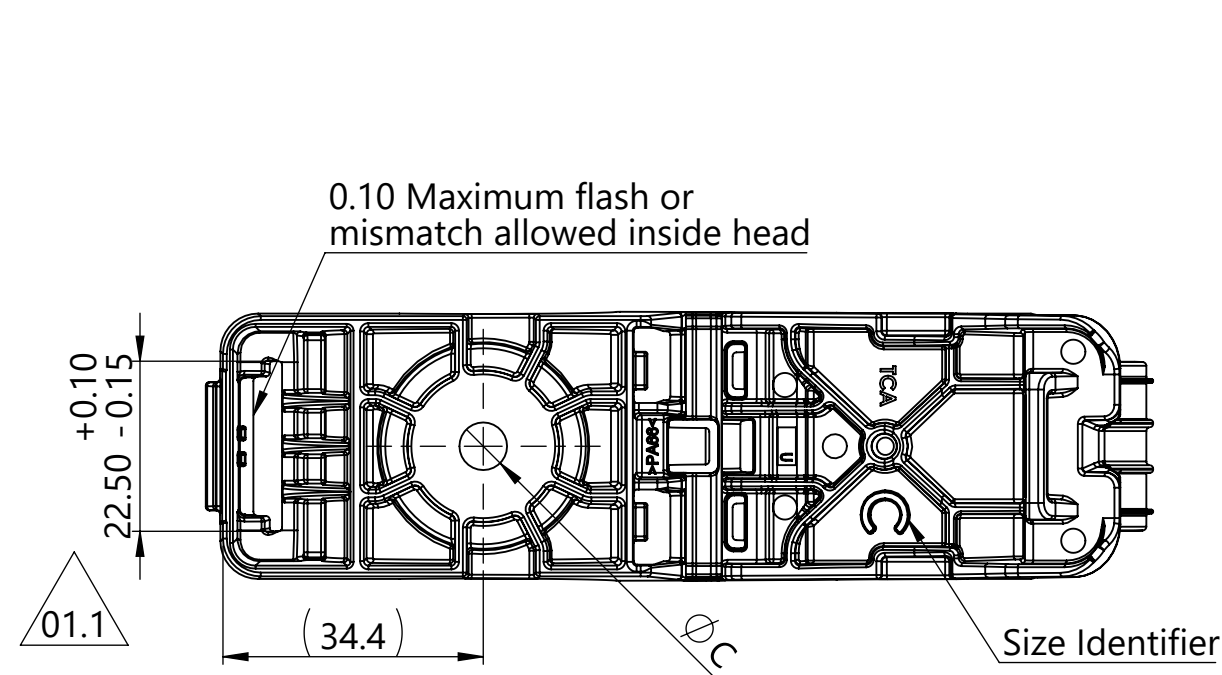

Section A-A

Notes:

1. Material: See chart
2. Material color: See chart
3. Maximum percent regrind permissible: 25%
4. Maximum allowable flash to be: 0.50 "Unless otherwise noted"
5. Maximum allowable mismatch to be: 0.15 "Unless otherwise noted"

Global Part Number	Global Part Description	Mounting Hole Size	Torque Specification	ØC	Type Number	Material	Color
21-0227	CMRCCLM6-PA66HIRHSUV-BK	M6	13 N-m [115.06 lb-in]	6.3 ±0.13	CMRCCLM6	PA66HIRHSUV	Black
21-0230	CMRCCLM8-PA66HIRHSUV-BK	M8	31 N-m [274.37 lb-in]	8.3 ±0.13	CMRCCLM8	PA66HIRHSUV	Black
21-0232	CMRCCLM10-PA66HIRHSUV-BK	M10	62 N-m [548.75 lb-in]	10.3 ±0.13	CMRCCLM10	PA66HIRHSUV	Black

Revision level			Revision Record						The copyright of this drawing is reserved by HellermannTyton.		Drawn		Date (YYYY/MM/DD)		CMRCLM6		
Drawing	State	Part	ECN 016968	Spangler	2021/04/28						Title	Center Mount RCC Ratchet P-Clamp, Size C, Clamp Range 18.9 to 36.0, Low Torque	Scale	1:1			
01.1	Design Release	-		All drawing revision are stored in CAD PDM database		Approved	Date (YYYY/MM/DD)	Drawing-No			21-0227-003-CSU			Global Project Number 21-0227			
Changed	Date (YYYY/MM/DD)		Toll			2021/04/28	Format									A2	
Spangler	2022/04/14		Units mm			HellermannTyton www.HellermannTyton.com		Sheet		1/1							
Approved	Date (YYYY/MM/DD)																
Gallion	2022/04/14																