

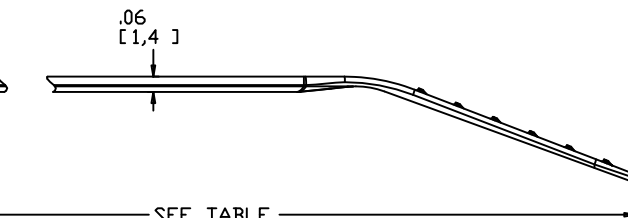
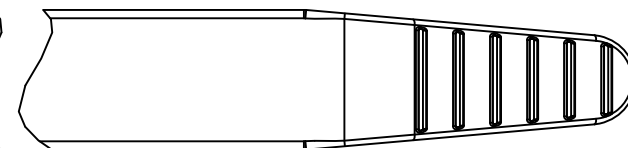
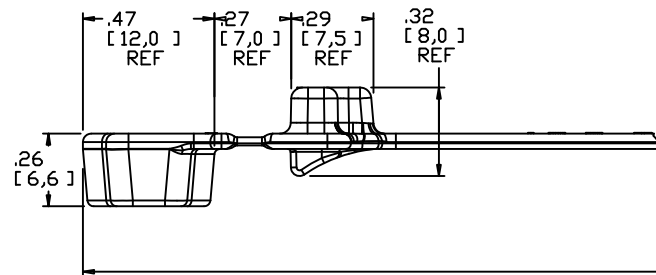




M8X1.25 STUD MOUNT REF

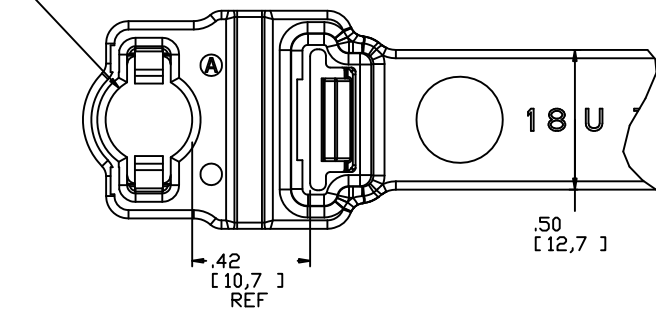

SEE TABLE

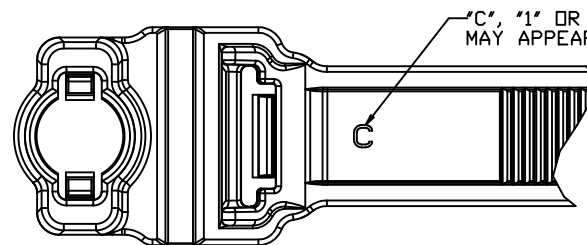

"C", "1" OR "2"
MAY APPEAR HERE

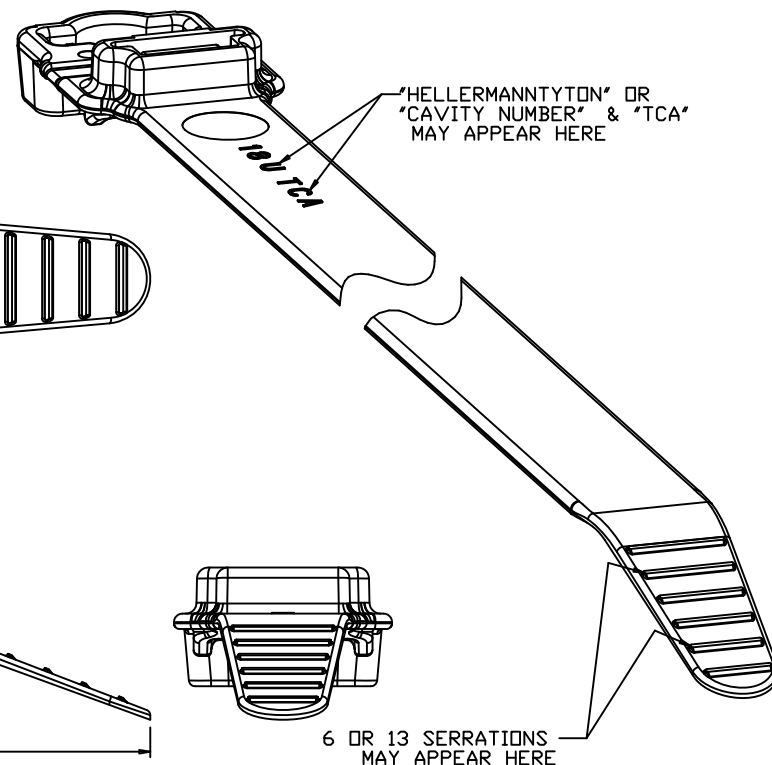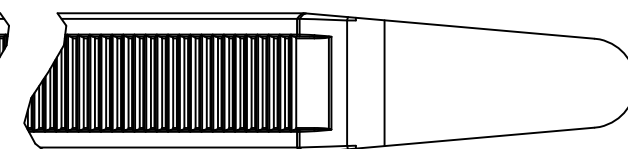

- PERFORMANCE REQUIREMENTS (Dry as Molded):**
1. STRAP INSERTION < 5 lb.
 2. MINIMUM WIRE BUNDLE DIAMETER = 3/8"
 3. LOOP TENSILE > 120 lb.
 4. STUD INSERTION < 20lb.
 5. STUD PULLOUT > 70lb.

PART NUMBER	OVERALL LENGTH	MAX BUNDLE DIA
WSS8MM	9.7/(246.4) REF	2.25/(57) REF
WSI8MM	12.7/(322.6) REF	3.25/(83) REF
WSR8MM	15.7/(398.8) REF	4.125/(105) REF

IN
V
E
N
T
O
R
S

HellermannTyton®

ALL PROPRIETARY RIGHTS IN THE SUBJECT MATTER SHOWN ON THIS DRAWING ARE EXCLUSIVE PROPERTY OF HELLERMANN TYTON

name	date	city, state
G GEIGER	3/17/03	JACKSON, WI

RE
V
I
S
I
O
N

level	07
by	GCG
date	7-24-19
ECN #	015312
part level	A

D
I
M
E
N
S
I
O
N
S

.XXXX= ± 0.005/[1,27]
.XXX= ± 0.010/[2,5]
.XX= ± 0.02 /[5]
.X= ± 0.25 /[6,4]
∠= ±0.5
unless otherwise specified
units inches/[mm]

P
A
R
T

number	see table	phase	PRODUCTION
name	WIDE STRAP TIE W/ M8X1.25 STUD MOUNT		
material	PA66HIRHSUV		

D
R
A
W
I
N
G

FORMAT AH version J	CAD	PRO-E	scale	3/2
computer file number		previous number		
drawn	G GEIGER	checked	K Christian	approved
	4/4/06		11/25/09	
type CUSTOMER			sheet 1 of 1	
number CT06-012-001CST				