

Cable ties for outdoor use (UV-resistant)

T-Series in PA66W/UV black

These inside serrated cable ties are made of UV-resistant Polyamide 6.6 (PA66W) and thus suitable for outdoor applications. UV stabilised cable ties resist UV radiation for a considerably longer period compared to standard PA66 cable ties. They can easily be used for bundling and securing cables, pipes and hoses especially in outdoor areas.



Features and benefits

- UV-resistant black cable tie available in a wide range of sizes
- Made from 100 % high quality plastic, allows for good recycling
- Inside serration for a strong hold onto bundles
- Easy application either manually or with a processing tool
- Simple to insert due to bent tail



UV-resistant T-Series cable ties (PA66W/UV).

Material information on page 22.

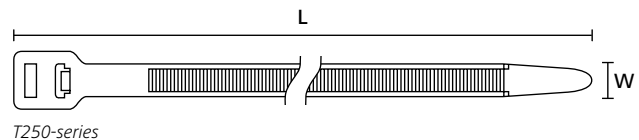

TYPE	Width (W)	Length (L)	Bundle Ø max.	N	Material	Colour	Pack Cont.	Tools	Article-No.
T18R	2.5	100.0	22.0	80	PA66W	Black (BK)	100 pcs.	1-2;4-6;25	111-01960
T18L	2.5	205.0	50.0	80	PA66W	Black (BK)	100 pcs.	1-2;4-6;25	111-02160
T30R	3.5	150.0	35.0	135	PA66W	Black (BK)	100 pcs.	1-2;4-6;25	111-03260
T30LL	3.5	290.0	80.0	135	PA66W	Black (BK)	100 pcs.	1-2;4-6;25	111-03570
T40R	4.0	175.0	40.0	180	PA66W	Black (BK)	100 pcs.	1-2;4-6;25	111-01625
T50R	4.6	200.0	50.0	225	PA66W	Black (BK)	100 pcs.	1-2;4-7;25	111-02191
T50M	4.6	245.0	65.0	225	PA66W	Black (BK)	100 pcs.	1-2;4-7;25	111-06206
T50L	4.6	390.0	110.0	225	PA66W	Black (BK)	100 pcs.	1-2;4-7;25	111-05440
	4.6	390.0	110.0	225	PA66W	Black (BK)	100 pcs.	1-2;4-7;25	111-02195
T80R	4.7	205.0	55.0	355	PA66W	Black (BK)	100 pcs.	1-2;4-7;25	111-05060
	4.7	210.0	55.0	355	PA66W	Black (BK)	1000 pcs.	1-2;4-7;25	111-05110
T80I	4.7	305.0	85.0	355	PA66W	Black (BK)	100 pcs.	1-2;4-7;25	111-08290
T80L	4.7	390.0	110.0	355	PA66W	Black (BK)	100 pcs.	1-2;4-7;25	111-05460
T120S	7.6	225.0	55.0	535	PA66W	Black (BK)	50 pcs.	1;3;7;9-10;25	111-12830
T150R(H)	7.6	365.0	100.0	670	PA66W	Black (BK)	100 pcs.	1;3;7;9-10;25	111-14860
T120R(E)	7.6	387.0	100.0	535	PA66W	Black (BK)	100 pcs.	1;3;7;9-10;25	111-12060
T120M	7.6	460.0	125.0	535	PA66W	Black (BK)	100 pcs.	1;3;7;9-10;25	111-12660
T120L	7.6	760.0	225.0	535	PA66W	Black (BK)	50 pcs.	1;3;7;9-10;25	111-12430
T150M	8.9	530.0	150.0	780	PA66UV	Black (BK)	25 pcs.	1;7;9-10	111-15660
T150L	8.9	820.0	245.0	780	PA66UV	Black (BK)	25 pcs.	1;7;9-10	111-15460
T250R	12.4	515.0	125.0	1115	PA66HIRHSUV	Black (BK)	25 pcs.	7;9-10	111-24805

Recommended Tools: 1=MK10-SB, 2=MK20, 3=MK21, 4=MK3PNSP2, 5=EVO7i, 6=MK7P, 7=EVO9i, 9=EVO9iHT, 10=MK9P, 25=EVOcut. For more information on toolings please refer to the Application Tooling chapter on page 346.

All dimensions in mm. Subject to technical changes. Minimum Order Quantity (MOQ) may differ from package content. Other packaging options may also be available.



Please note! Not all products listed on this page may have this approval. Please check our website for latest approvals.



Material Specification Overview

MATERIAL	Material Shortcut	Operating Temperature	Colour**	Flammability	Material Properties*	Material Specifications
Aluminium alloy	AL	-40 °C to +180 °C	Natural (NA)		• Corrosion resistant • Antimagnetic	RoHS
Chloroprene Rubber	CR	-20 °C to +80 °C	Black (BK)		• Weather resistant • High yield strength	RoHS
Ethylene Tetrafluoroethylene (Tefzel®)	E/TFE	-80 °C to +170 °C	Blue (BU)	UL 94 V0	• Resistance to radioactivity • UV resistant, not moisture sensitive • Good chemical resistance to acids, bases, oxidizing agents	RoHS
Polyacetal	POM	-40 °C to +90 °C, (+110 °C, 500 h)	Natural (NA)	UL 94 HB	• Limited brittleness sensitivity • Flexible at low temperature • Not moisture sensitive • Robust on impact	RoHS
Polyamide 11	PA11	-40 °C to +85 °C, (+105 °C, 500 h)	Black (BK)	UL 94 HB	• Bio-plastic, derived from vegetable oil • Strong impact resistance at low temperature • Very low moisture absorption • Weather resistant • Good chemical resistance	HF RoHS
Polyamide 12	PA12	-40 °C to +85 °C, (+105 °C, 500 h)	Black (BK)	UL 94 HB	• Good chemical resistance to acids, bases, oxidizing agents • UV resistant	HF RoHS
Polyamide 4.6	PA46	-40 °C to +130 °C, (+150 °C, 5000 h; +195 °C, 500 h)	Natural (NA), Grey (GY)	UL 94 V2	• Resistance to high temperatures • Very moisture sensitive • Low smoke sensitivity	HF LFH RoHS
Polyamide 6	PA6	-40 °C to +80 °C	Black (BK)	UL 94 V2	• High yield strength	RoHS
Polyamide 6, high impact modified	PA6HIR	-40 °C to +80 °C	Black (BK)	UL 94 HB	• Limited brittleness sensitivity • Higher flexibility at low temperature	RoHS
Polyamide 6.6	PA66	-40 °C to +85 °C, (+105 °C, 500 h)	Black (BK), Natural (NA)	UL 94 V2	• High yield strength	HF RoHS
Polyamide 6.6, glass-fibre reinforced	PA66GF13	-40 °C to +105 °C	Black (BK)	UL 94 HB	• Good resistance to lubricants, fuels, salt water and solvents	HF RoHS
Polyamide 6.6, heat and UV-stabilised	PA66HSUV	-40 °C to +105 °C	Black (BK)	UL 94 V2	• High yield strength • Modified elevated maximum temperature • UV resistant	HF RoHS
Polyamide 6.6, heat stabilised	PA66HS	-40 °C to +105 °C	Black (BK), Natural (NA)	UL 94 V2	• High yield strength • Modified elevated maximum temperature	HF RoHS
Polyamide 6.6, high impact modified	PA66HIR	-40 °C to +80 °C, (+105 °C, 500 h)	Black (BK)	UL 94 HB	• Limited brittleness sensitivity • Higher flexibility at low temperature	RoHS
Polyamide 6.6, high impact modified, heat and UV-stabilised	PA66HIRHSUV	-40 °C to +110 °C	Black (BK)	UL 94 HB	• Limited brittleness sensitivity • Higher flexibility at low temperature • Modified elevated maximum temperature • High yield strength, UV resistant	RoHS
Polyamide 6.6, high impact modified, heat stabilised	PA66HIRHS	-40 °C to +105 °C	Black (BK)	UL 94 HB	• Limited brittleness sensitivity • Higher flexibility at low temperature • Modified elevated maximum temperature	RoHS
Polyamide 6.6, high impact modified, scan black)	PA66HIR(S)	-40 °C to +80 °C, (+105 °C, 500 h)	Black (BK)	UL 94 HB	• Limited brittleness sensitivity • Higher flexibility at low temperature	HF RoHS
Polyamide 6.6, UV-resistant	PA66W	-40 °C to +85 °C, (+105 °C, 500 h)	Black (BK)	UL 94 V2	• High yield strength • UV resistant	HF RoHS

MATERIAL	Material Shortcut	Operating Temperature	Colour**	Flammability	Material Properties*	Material Specifications
Polyamide 6.6, with metal particles	PA66MP	-40 °C to +85 °C, (+105 °C, 500 h)	Blue (BU)	UL 94 HB	- High yield strength - Metal and X-Ray detectable	HF RoHS
Polyamide 6.6, with metal particles	PA66MP+	-40 °C to +85 °C	Blue (BU)	not flame-retardant	- High yield strength - Metal and X-Ray detectable	HF RoHS
Polyamide 6.6 V0	PA66V0	-40 °C to +85 °C	White (WH)	UL 94 V0	- High yield strength - Low smoke emission	HF LFH RoHS
Polyester	SP	-50 °C to +150 °C	Black (BK)		- UV resistant - Good chemical resistance to most acids, bases and oils	HF LFH RoHS
Polyetheretherketone	PEEK	-55 °C to +240 °C	Beige (BGE)	UL 94 V2	- Resistance to radioactivity - Not moisture sensitive - Good chemical resistance to acids, bases, oxidising agents	HF LFH RoHS
Polyethylene	PE	-40 °C to +50 °C	Black (BK), Grey (GY)	UL 94 HB	- Low moisture absorption - Good chemical resistance to most acids, bases, alcohol, oils	HF RoHS
Polyolefin	PO	-40 °C to +90 °C	Black (BK)	UL 94 V0	Low smoke emissions	HF LFH RoHS
Polypropylene	PP	-40 °C to +115 °C	Black (BK), Natural (NA)	UL 94 HB	- Floats in water - Moderate yield strength - Good chemical resistance to acids, bases and solvents	HF RoHS
Polypropylene, Ethylene Propylene Diene Terpolymer rubber free of Nitrosamine	PP, EPDM	-20 °C to +95 °C	Black (BK)	UL 94 HB	- Good resistance to high temperature - Good chemical and abrasion resistance	HF RoHS
Polypropylene with metal particles	PPMP	-40 °C to +115 °C	Blue (BU)	UL 94 HB	- Metal and X-Ray detectable - Heat resistant - Moderate yield strength - Good chemical resistance	RoHS
Polypropylene with metal particles	PPMP+	-40 °C to +85 °C	Blue (BU)	not flame-retardant	- High yield strength - Metal and X-Ray detectable	HF RoHS
Polyvinylchloride	PVC	-10 °C to +70 °C	Black (BK), Natural (NA)	UL 94 V0	- Low moisture absorption - Good chemical resistance to acids, bases, salts, alcohol, oils	RoHS
Stainless Steel, Stainless Steel	SS304, SS316	-80 °C to +538 °C	Natural (NA)	non-burning	- Corrosion resistant - Antimagnetic - Weather resistant - Chemical resistance - SS316 also resistant against seawater, salt spray and anorganic acids	HF LFH RoHS
Thermoplastic Polyurethane	TPU	-40 °C to +85 °C	Black (BK)	UL 94 HB	- High elasticity - Good chemical resistance to acids, bases and oxidising agents	HF RoHS

Tefzel® is a registered trademark of DuPont. General linguistic usage for cable ties made from raw material E/TFE is Tefzel®-Tie. In addition to Tefzel® from DuPont HellermannTyton also uses equivalent E/TFE raw material from other suppliers.

*These details are only guide values. They should not be regarded as an exhaustive material specification and are no substitute for suitability tests. Please see our datasheets for further details.

HF = Halogen Free

LFH = Limited Fire Hazard

RoHS = Restriction of Hazardous Substances

**Further colours available on request.

 = Minimum Loop Tensile Strength for Cable Ties (newton)

**For more material information
please visit our website.**